

## VE2812AEUT

HDMI & VGA HDBaseT Transmitter with EU Wall Plate / PoH (4K@100m) (HDBaseT Class A) (PoH PD)





**More than  
AV Extension**



# VE2812AEUT

HDMI & VGA HDBaseT  
Transmitter with EU Wall Plate / PoH

With minimal dimension requirements that can fit both EU and MK standards across different regions, the VE2812AEUT is a wall plate transmitter for sending VGA (with audio) and HDMI signals up to 100 m over a single Cat 5e/6/6a cable that is designed to merge with the clean and elegant décor of modern meetings rooms, boardrooms, conference rooms, classrooms and lecture halls.



#### Ready for Plug-and-Play

Available with both MK and EU mounting brackets for more convenient installation, the VE2812AEUT supports legacy and popular AV interfaces like VGA, HDMI, and stereo audio so that you're ready to connect any device that is brought into the room.



**4K@100m Extended Transmission**

Delivers superior video quality up to 4K@100m and 1080p@150m via a single Cat 6a / ATEN [2L-2910](#) Cat 6 cable, extending connections to where ever your output devices are located. Easily pair from our range of HDBaseT Receivers to support diverse display interfaces such as DisplayPort, HDMI, and DVI.

**Multiple, Efficient Switching Options**

The Source Switch button enables instant switching when required, while Auto Switch Mode supports automatic switching to a newly plugged-in source and instant switching back to the previous source on disconnection. Also supports RS-232 for switching via alternate control interfaces.




## Contact Us

Get a quote for this product or get in touch with our sales experts

[Get Quote](#)

[Contact Sales](#)

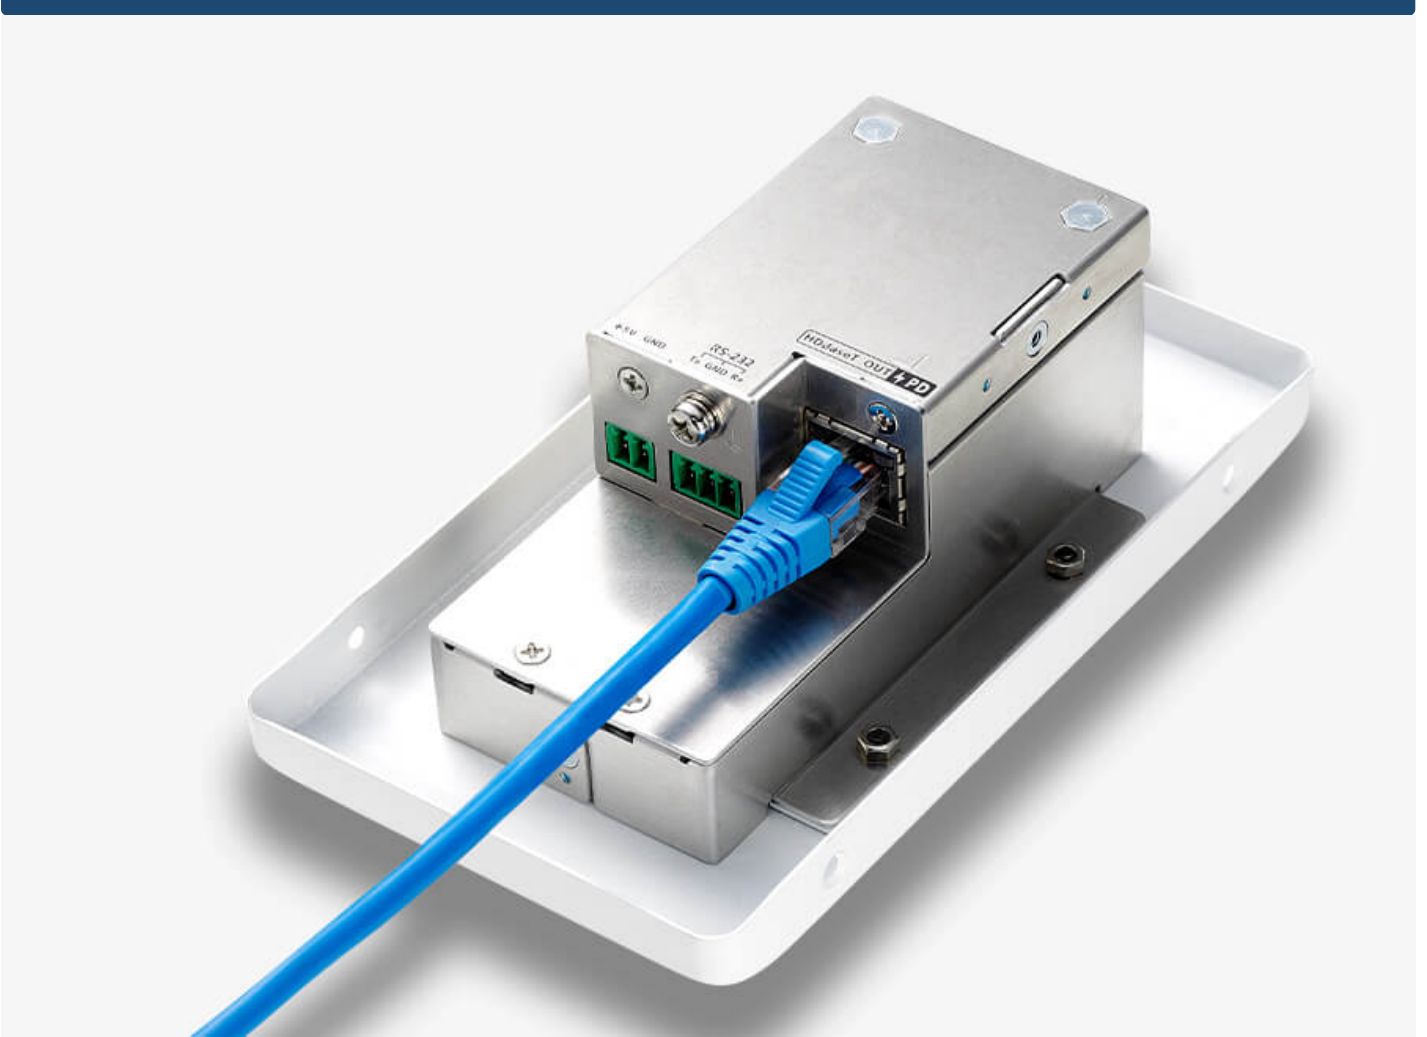**Convenient Power Access**

Supports Power over HDBaseT (PoH) and allows powering from another Power Source Equipment (PSE) device. No more worries about extending or installing power outlets.

**AV Extension and More**

In addition to transmitting video and audio, the VE2812AEUT maximizes HDBaseT™ technology capabilities and offers IR and RS-232 Channels to control devices located in hard-to-reach areas as well as streamline the user operation experience.



**Perfectly Blends with the Environment**

Comes with a stylish and sleek design for you to elegantly immerse extensions into the décor of any room.



The VE2812AEUT also blends seamlessly with the ergonomic [VK102](#) tabletop kit, providing optimal convenience with plug-n-play connectivity.



## Talk to Our Experts

If you prefer to have ATEN contact you, please complete the form and a representative will be in touch with you shortly

- Country \*

- Customer Type \*


---



**Features**

ATEN VE2812AEUT is a transmitter for sending VGA (with audio) and HDMI signals up to 100 m over a single Cat 5e/6/6a or ATEN [2L-2910](#) Cat 6 cable. Featuring built-in PoH (Power over HDBaseT) function, the VE2812AEUT receives power supply from the HDBaseT output port on the connected device. This eliminates the need for a power adapter and reduces the hassle of power line deployment behind the wall. With EU Wall Plate design, the VE2812AEUT can be conveniently mounted in a two – gang junction box. The VE2812AEUT guarantees reliable transmission of HDMI / VGA signals. For HDMI signal transmission, it supports 3D, Deep Color, and embedded HD lossless audio formats. To pursue longer distance transmission, it supports Long Reach Mode up to 150 m via a single Cat 5e/6 cable at resolutions up to 1080p.

For utility flexibility, the VE2812AEUT can serve as a video switch by connecting two sources and distribute them to an identical output. The compact wall plate design does away with bulky cables, allowing a neat and convenient installation in the wall or the table. Therefore, the VE2812AEUT is specifically designed for use in meeting rooms, digital educational environment or wherever needed to meet application requirements.

Note: 1. All pictures shown are for illustration purpose only. Actual color of the product is based on the product you receive.  
 2. Optional accessory ([2X-050G](#)) is available with a separate purchase if you wish to mount the VE2812AEUT into the cable cubby.


- Extends HDMI or VGA signals over a single Cat 5e/6/6a or ATEN [2L-2910](#) Cat 6 cable
- Superior video quality:
  - HDMI: 4K at distance up to 100 m via a Cat 6a or ATEN [2L-2910](#) Cat 6 cable
  - VGA: 1600 x 1200 and 1920 x 1200 up to 100 m via a Cat 6a or ATEN [2L-2910](#) Cat 6 cable
- HDMI (3D, Deep color, 4K); HDCP 2.2 compliant
- Supports HDBaseT Long Reach Mode – up to 150 m via a single Cat 5e/6 cable at resolutions up to 1080p
- Designed to mount in a two-gang junction box, compatible with EU & MK type
- Built-in PoH (Power over HDBaseT) function – the VE2812AEUT receives power supply from the HDBaseT output port on the connected device
- Supports Auto Switch – allows the VE2812AEUT to automatically switch to a newly plugged-in source
- Functions as a switch or a converter
  - A Switch: Connects two sources (HDMI or VGA)
  - A Converter: Applies receivers with different interface (DVI, DisplayPort, or HDMI)
- Supports RS-232 channel transmission or command mode for source switch control
- Compatible Receivers – [VE2812R](#), [VE1812R](#), [VE812R](#), [VE814AR](#), [VE811R](#), [VE801R](#), [VE802R](#), [VE601R](#), [VE901R](#), [VE2812PR](#) or future ATEN HDBaseT Receivers
- Plug-and-play
- LED indication of sources and device status
- Built-in 8KV / 15 KV ESD protection

**Specification**

|             |  |
|-------------|--|
| Video Input |  |
| Interfaces  | 1 x HDMI Type A Female (Black)<br>1 x HDB-15 (VGA) Female (Blue) |

|                                  |   |
|----------------------------------|---|
| Impedance                        | HDMI: 100 Ω<br>HDB-15 (VGA): 75 Ω   |
| Max. Distance                    | HDMI: 3 m<br>HDB-15(VGA): 10m   |
| Video                            |   |
| Max. Data Rate                   | 10.2Gbps (3.4Gbps per lane)   |
| Max. Pixel Clock                 | 340 MHz   |
| Compliance                       | HDMI (3D, Deep Color, 4K)<br>HDCP2.2 Compatible<br>Consumer Electronics Control (CEC)   |
| Max. Resolutions / Distance      | HDMI: Up to 4K@70m (Cat 5e/6) / 100m (Cat 6a/ATEN 2L-2910 Cat6); 1080p@100m (Cat 5e/6/6a)<br>VGA: Up to 1920x1200 & 1600x1200@70m (Cat 5e/6) / 100m (Cat 6a/ATEN 2L-2910 Cat6); 1920x1080@100m (Cat 5e/6/6a)<br>*4K supported:<br>4096 x 2160 / 3840 x 2160 @ 60Hz (4:2:0);<br>4096 x 2160 / 3840 x 2160 @ 30Hz (4:4:4)         |
| Audio                            |   |
| Input                            | 1 x HDMI Type A Female (Black)<br>1 x Mini Stereo Jack Female (Green)   |
| Control                          |   |
| RS-232                           | Connector: 1 x Terminal Block, 3 pole (Green)<br>Baud Rate: 19200, Data Bits:8,<br>Stop Bits:1, no parity and flow control  |
| IR                               | 1 x Mini Stereo Jack Female (Black)   |
| Switches                         |   |
| Video Input Port Selection       | 1 x Push Button - HDMI, VGA and AUTO  |
| Long Reach Mode Switch           | 1 x Slide Switch - ON/OFF   |
| Firmware Upgrade                 | 1 x Slide Switch - ON/OFF   |
| Connectors                       |   |
| Unit To Unit                     | 1 x RJ-45 Female  |
| Power                            | 1 x Terminal Block, 2 pole (Green) or<br>1 x RJ-45 Female (POH)   |
| Power Consumption                | DC5V:3.14W:15BTU/h<br>POH:3.93W:18BTU/h<br><br>Note:<br><ul style="list-style-type: none"> <li>• The measurement in Watts indicates the typical power consumption of the device with no external loading.</li> <li>• The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.</li> </ul> |
| Environmental                    |   |
| Operating Temperature            | 0 - 40°C  |
| Storage Temperature              | -20 - 60°C  |
| Humidity                         | 0 - 80% RH, Non-Condensing  |
| Physical Properties              |   |
| Housing                          | Metal   |
| Weight                           | 0.30 kg ( 0.66 lb )   |
| Dimensions (L x W x H)           | 5.00 x 10.80 x 5.17 cm<br>(1.97 x 4.25 x 2.04 in.)  |
| Faceplate Dimensions (L x W x H) | 8.60 x 15.10 x 1.35 cm<br>(3.39 x 5.94 x 0.53 in.)  |
| Note                             | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.   |

Diagram

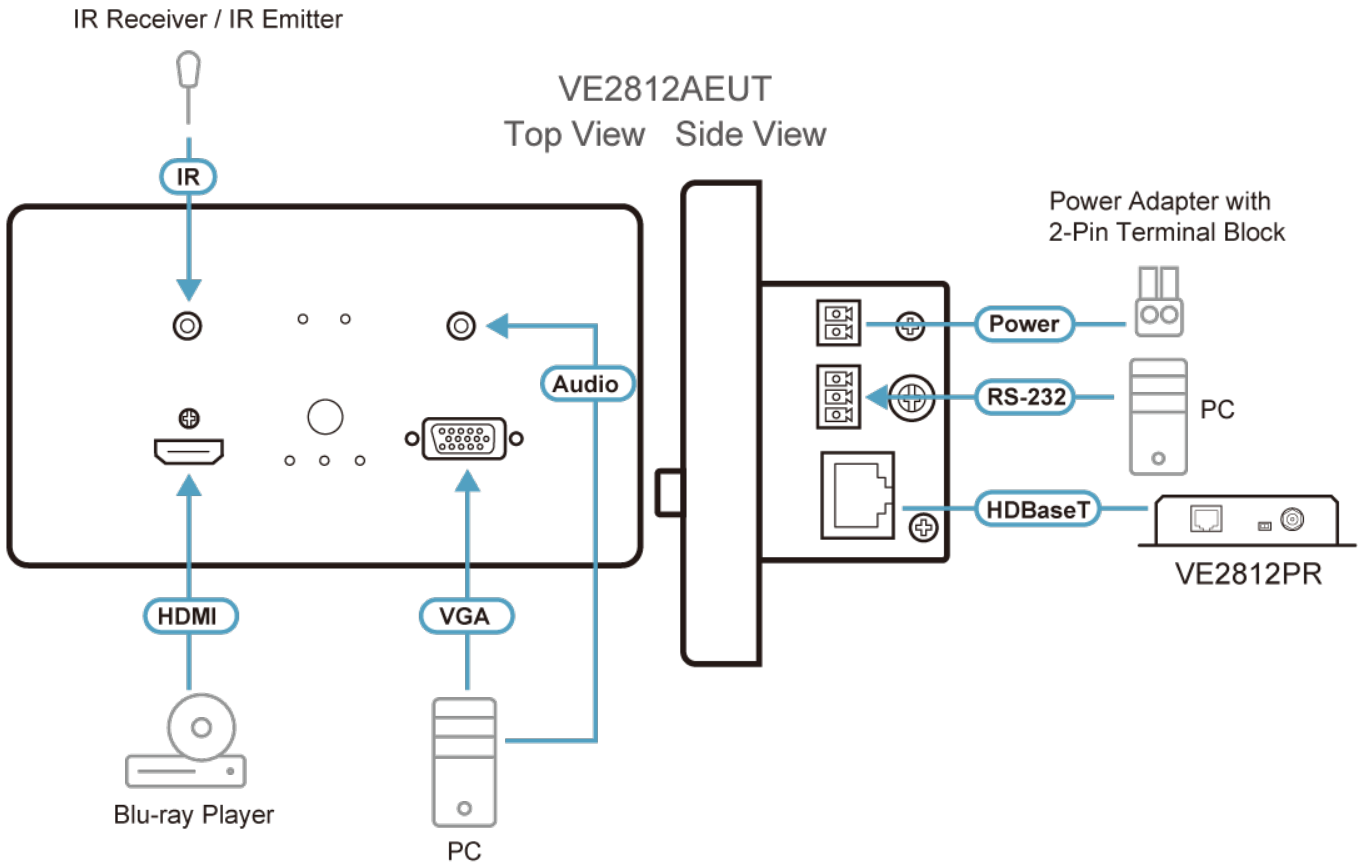

**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.