

## UE3310

10 m USB 3.2 Gen 1 Extender Cable



The ATEN UE3310 USB 3.2 Gen1 Extender Cable allows users to extend the distance between the computer and USB devices up to 10 m. The UE3310 provides a reliable, high performance data transmission that utilizes USB 3.2 Gen1 data bandwidth up to 5Gb/s and also backward compatible with USB 2.0/1.1 standard. It's plug and play and no additional software installation required, easy to deploy and operate on the fields.

The UE3310 provides a quick and high quality cost effective solution for all kinds of professional environments like: hospitals, factories, or business facilities.

Note: Please visit [ATEN Support Center](#) to view the test report for the compatible webcams for more information.

10m

Long Distance Transmission



USB 3.2 Gen 1



Daisy-Chain



Bus-Powered

### Features


- Supports USB 3.2 Gen1 Specification (5 Gbps)
- Ultra slim design and unique locker head design
- Daisy-chainable, maximum distance of up to 50 m
- Multiplatform support – Windows and Mac
- Additional power adapter included

# Specification

|                        |                                                                                                                                 |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Connectors             |                                                                                                                                 |
| USB Port               | 1 x USB3.2 Gen1 Type A Male                                                                                                     |
| Downstream             | 1 x USB3.2 Gen1 Type A Female                                                                                                   |
| USB Specification      | USB3.2 Gen1 / 2.0 / 1.1 for Super / High / Full or Low speed                                                                    |
| Cable Length           | 10 m                                                                                                                            |
| Data Rate              | Up to 5 Gbps                                                                                                                    |
| Environmental          |                                                                                                                                 |
| Operating Temperature  | 0–40°C                                                                                                                          |
| Storage Temperature    | -20–60°C                                                                                                                        |
| Humidity               | 0-80% RH, Non-condensing                                                                                                        |
| Physical Properties    |                                                                                                                                 |
| Housing                | Plastic                                                                                                                         |
| Weight                 | 0.76 kg ( 1.67 lb )                                                                                                             |
| Dimensions (L x W x H) | 8.19 x 2.22 x 1.75 cm<br>(3.22 x 0.87 x 0.69 in.)                                                                               |
| Note                   | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. |

Diagram

► Diagram

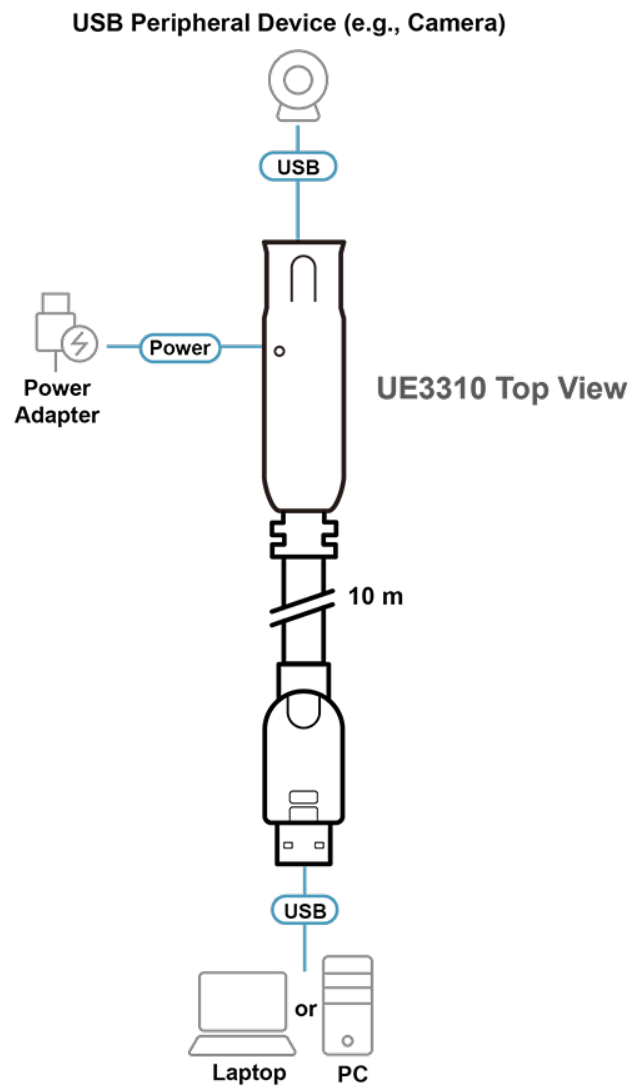

**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.