

PE0316B

0U Basic PDU

PE0316B



ATEN's Basic [PDU](#) family is extended with 0U members containing 16 outlets and available in IEC socket configurations. The compact aluminum housing gives a sleek, yet robust look while minimizing installation space for work space efficiency. The Basic [PDUs](#) are tailored made for individuals who are in need of industrial-grade, easy-to-deploy power distribution unit in [data centers](#), server rooms, and network wiring closets.


Features

- Space saving – 0U rack mount design
- IEC outlet model
- Aluminum material
- Works with [data centers](#), server rooms, and telecom equipment

Specifications

| | |
|------------------------------------|---|
| Electrical | |
| Nominal Input Voltage | 100-240 VAC |
| Maximum Input Current | 30A Max (UL de-rated 24A Max) |
| Input Frequency | 50-60 Hz |
| Input Connection | NEMA L6-30P |
| Input Power | 7200VA(Max); 5760VA(UL de-rated) |
| Outlet Type | (16) IEC 320 C13 |
| Maximum Output Current (Outlet) | 15A Max (UL de-rated 12A Max) |
| Maximum Output Current (Bank) | 20A Max (UL de-rated 16A Max) |
| Maximum Output Current (Total) | 30A Max (UL de-rated 24A Max) |
| OPD(Overcurrent Protection Device) | Yes |
| Physical Properties | |
| Dimensions (L x W x H) | 96.71 x 4.44 x 9.28 cm (38.07 x 1.75 x 3.65 in.) |
| Weight | 2.50 kg (5.51 lb) |
| Power Cord Length | 10ft(10#) |
| Environmental | |
| Temperature (Operating / Storage) | 0 – 40°C / -20 – 60°C |
| Elevation (Operating / Storage) | 3000m |
| Compliance | |
| EMC Verification | FCC Class A |
| Safety Verification | UL, other by request |
| Note | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. |

Diagram

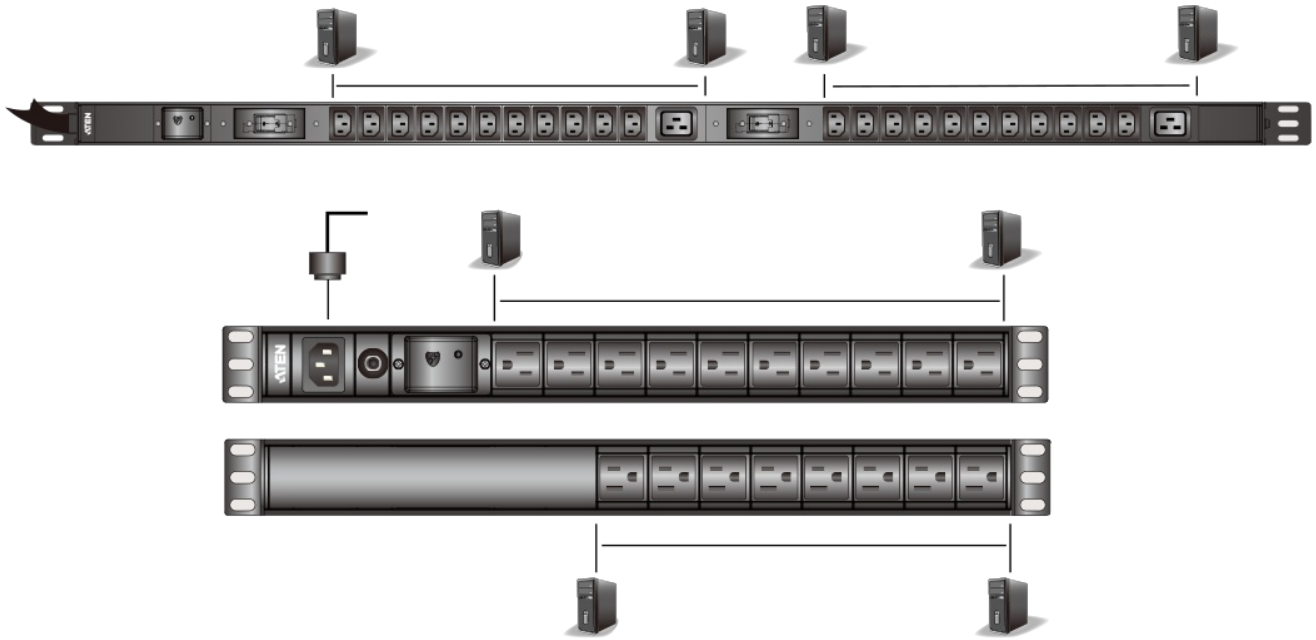

Note: (1) As there are many Basic PDUs, PE0324S (top) and PE0118S (bottom) are the respective 0U and 1U examples used here.

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.