

## PE7324r

eco PDU



As part of its NRGence line, ATEN has developed a new generation of green energy power distribution units (eco [PDU](#)s) to effectively increase the efficiency of [data center](#) power usage. The NRGence PE7324r eco [PDU](#)s are intelligent [PDU](#)s that contain 24 AC outlets and are available in various IEC or NEMA socket configurations.

NRGence eco [PDU](#)s provide secure, centralized, intelligent, power management (power on, off, cycle) of [data center](#) IT equipment (servers, storage systems, KVM switches, network devices, serial data devices, etc.), as well as the ability to monitor the center's health environment via sensors \*.

NRGence eco [PDU](#)s offer remote power control combined with real-time power measurement – allowing you to control and monitor the power status of devices attached to the [PDU](#)s, either at the [PDU](#) device, bank, or outlet level, depending on the model, from practically any location via a TCP/IP connection \*\*.

The eco [PDU](#) also offers comprehensive power analysis reports which can separate departments and locations, providing precise measurements of current, voltage, power and watt-hour in a real-time display.

In order to manage more outlets from the same single session, the eco [PDU](#) also provides daisy chain functionality; up to 5 additional units can be daisy chained. Installation and operation is fast and easy: plugging cables into their appropriate ports and user-friendly browser-based configuration and management is all that is entailed. Since the eco [PDU](#) firmware is upgradeable over the Net, you can stay current with the latest functionality improvements simply by downloading updates from our website as they become available.

NRGence eco [PDU](#) supports any 3rd party V1, V2, V3 SNMP Manager Software, NRGence [eco Sensors](#) (eco [PDU](#) Manager Software), and [CC2000](#) Control Center Over the NET software. [Eco Sensors](#) provides you with an easy method for managing multiple devices, offering an intuitive and user-friendly Graphical User Interface that allows you to configure a [PDU](#) device and monitor power status of the equipment connected to it.

With its advanced security features and ease of operation, the eco [PDU](#) is the most convenient, most reliable, and most cost effective way to remotely manage power access for multiple computer installations and allocate power resources in the most efficient way possible.

Note:

\* Sensors are optional accessories. A sensor-enabled installation is required to generate a more complete energyefficient data and chart. Higher sensor installation density is helpful to generate more accurate data.

\*\* eco [PDU](#)s are primarily designed for access via Intranet; extra network security protection is suggested for Internet access usage.

## Features


- **Connections**
- Supports 10/100Mbit Ethernet, OOB, RS-232, Daisy Chain interface
- Supports TCP/IP, PPP, UDP, HTTP, HTTPS, SSL, STP, DHCP, ARP, NTP, DNS, Telnet, Auto Sense, Ping, SNMP V1,V2&V3, IPv6
- Supports three-level account/password security, IP/MAC filter, 128 bit SSL, RADIUS, TACACS+, LDAP, LDAPS and Active Directory
- Supports [CC2000](#), [eco Sensors](#), Java API, multiple Browsers (IE, Firefox, Chrome, Safari)
- **Metering**
- PDU and outlet level power metering and monitoring
- Environment monitoring – supports external temperature/temperature & humidity sensors for rack temperature and humidity monitoring
- Current, voltage, power, power dissipation, temperature, and humidity metering and threshold level setting
- **Outlet Switch Control**
- Daisy chain with PON In – PON Out port
- Always On

## Specifications

| Function                        | PE7324rB   | PE7324rG   |
|---------------------------------|--|--|
| Electrical                      |  |  |
| Nominal Input Voltage           | 100 – 240 VAC  | 100 – 240 VAC  |
| Maximum Input Current           | 30A(Max); 24A(UL de-rated)   | 32A(Max)   |
| Input Frequency                 | 50-60 Hz   | 50-60 Hz   |
| Input Connection                | NEMA L6-30P  | IEC 60309 32A  |
| Input Power                     | 6240 VA(Max); 4992 VA(UL de-rated)   | 7360 VA(Max)   |
| Outlet Type                     | Total: 21 x IEC320 C13 + 3 x IEC320 C19<br>Bank1-1: Outlet 1 – 8; 7 x C13 + 1 x C19<br>Bank1-2: Outlet 9 – 16; 7 x C13 + 1 x C19<br>Bank2: Outlet 17 – 24; 7 x C13 + 1 x C19 | Total: 21 x IEC320 C13 + 3 x IEC320 C19<br>Bank1-1: Outlet 1 – 8; 7 x C13 + 1 x C19<br>Bank1-2: Outlet 9 – 16; 7 x C13 + 1 x C19<br>Bank2: Outlet 17 – 24; 7 x C13 + 1 x C19 |
| Nominal Output Voltage          | 100 – 240 VAC  | 100 – 240 VAC  |
| Maximum Output Current (Outlet) | C13: 15A(Max); 12A(UL de-rated)<br>C19: 15A(Max); 12A(UL de-rated)   | C13: 10A(Max)<br>C19: 16A(Max); TUV De-rated 15A(Max)  |
| Maximum Output Current (Bank)   | 15A(Max); 12A(UL de-rated)   | 16A(Max); TUV De-rated 15A(Max)  |
| Maximum Output Current (Total)  | 30A(Max); 24A(UL de-rated)   | 32A(Max); TUV De-rated 30A(Max)  |
| Breakers                        | 2 x 16A UL489 Breaker  | 2 x 16A UL489 Breaker  |
| Metering                        | Outlet Level Current, Voltage, VA , PF and kWh Monitoring  | Outlet Level Current, Voltage, VA , PF and kWh Monitoring  |
| Outlet Switching                | None   | None   |
| Environment Sensor Ports        | 4  | 4  |
| Metering Accuracy               | Voltage Range: 100VAC ~ 250VAC +/-1%<br>Power Range: 100W ~ Maximum Capacity +/- 2%<br>Current Range: 0.1A~1A +/- 0.1A, 1A~20A +/-1%   | Voltage Range: 100VAC ~ 250VAC +/-1%<br>Power Range: 100W ~ Maximum Capacity +/- 2%<br>Current Range: 0.1A~1A +/- 0.1A, 1A~20A +/-1%   |
| Physical Properties             |  |  |
| Dimensions (L x W x H)          | 132.5 x 6.6 x 4.4 cm   | 132.5 x 6.6 x 4.4 cm   |
| Weight                          | 3.7 kg   | 3.7 kg   |

|                                   |   |                               |
|-----------------------------------|---|-------------------------------|
| Power Cord Length                 | 1.6 m   | 1.6 m                         |
| Environmental                     |   |                               |
| Temperature (Operating / Storage) | 0–50°C / -20–60°C   | 0–40°C / -20–60°C             |
| Humidity (Operating & Storage)    | 0–80% RH, Non-Condensing  | 0–80% RH, Non-Condensing      |
| Compliance                        |   |                               |
| EMC Verification                  | FCC, Others by Request  | CE, C-Tick, Others by Request |
| Safety Verification               | PSE, Others by Request  | GOST, Others by Request       |
| Note                              | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. |                               |

**Diagram**

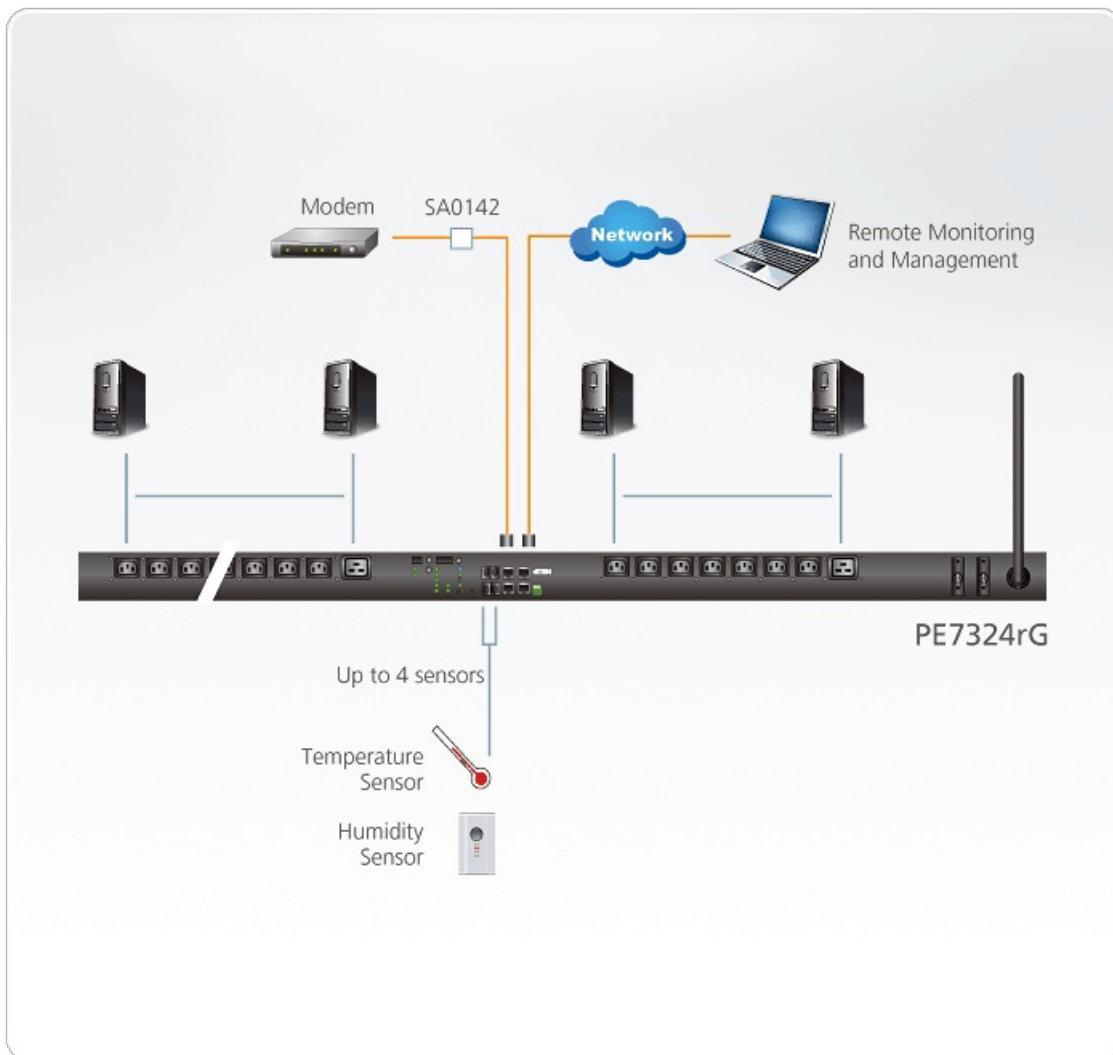



Simply Better Connections

***ATEN International Co., Ltd.***

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their  
respective owners.