


VC925

DisplayPort to VGA Adapter



DisplayPort to VGA Adapter

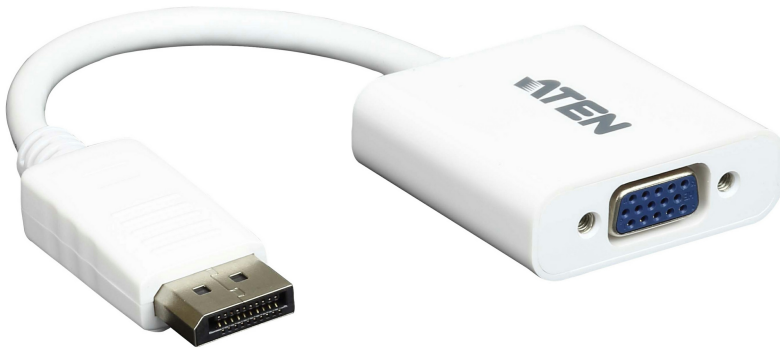

DisplayPort Input
DisplayPort 1.2a compliant

VGA Output

**Plug-n-Play**

No installation software or drivers required. The VC925 is the perfect solution for connecting DisplayPort inputs to VGA output displays.

Superior Video Resolution

Supports VGA, SVGA, XGA, SXGA, UXGA, and resolutions up to 1920 x 1200 and 1080p, making it highly compatible across devices.




Contact Us

Get a quote for this product or get in touch with our sales experts

[Get Quote](#)

[Contact Sales](#)

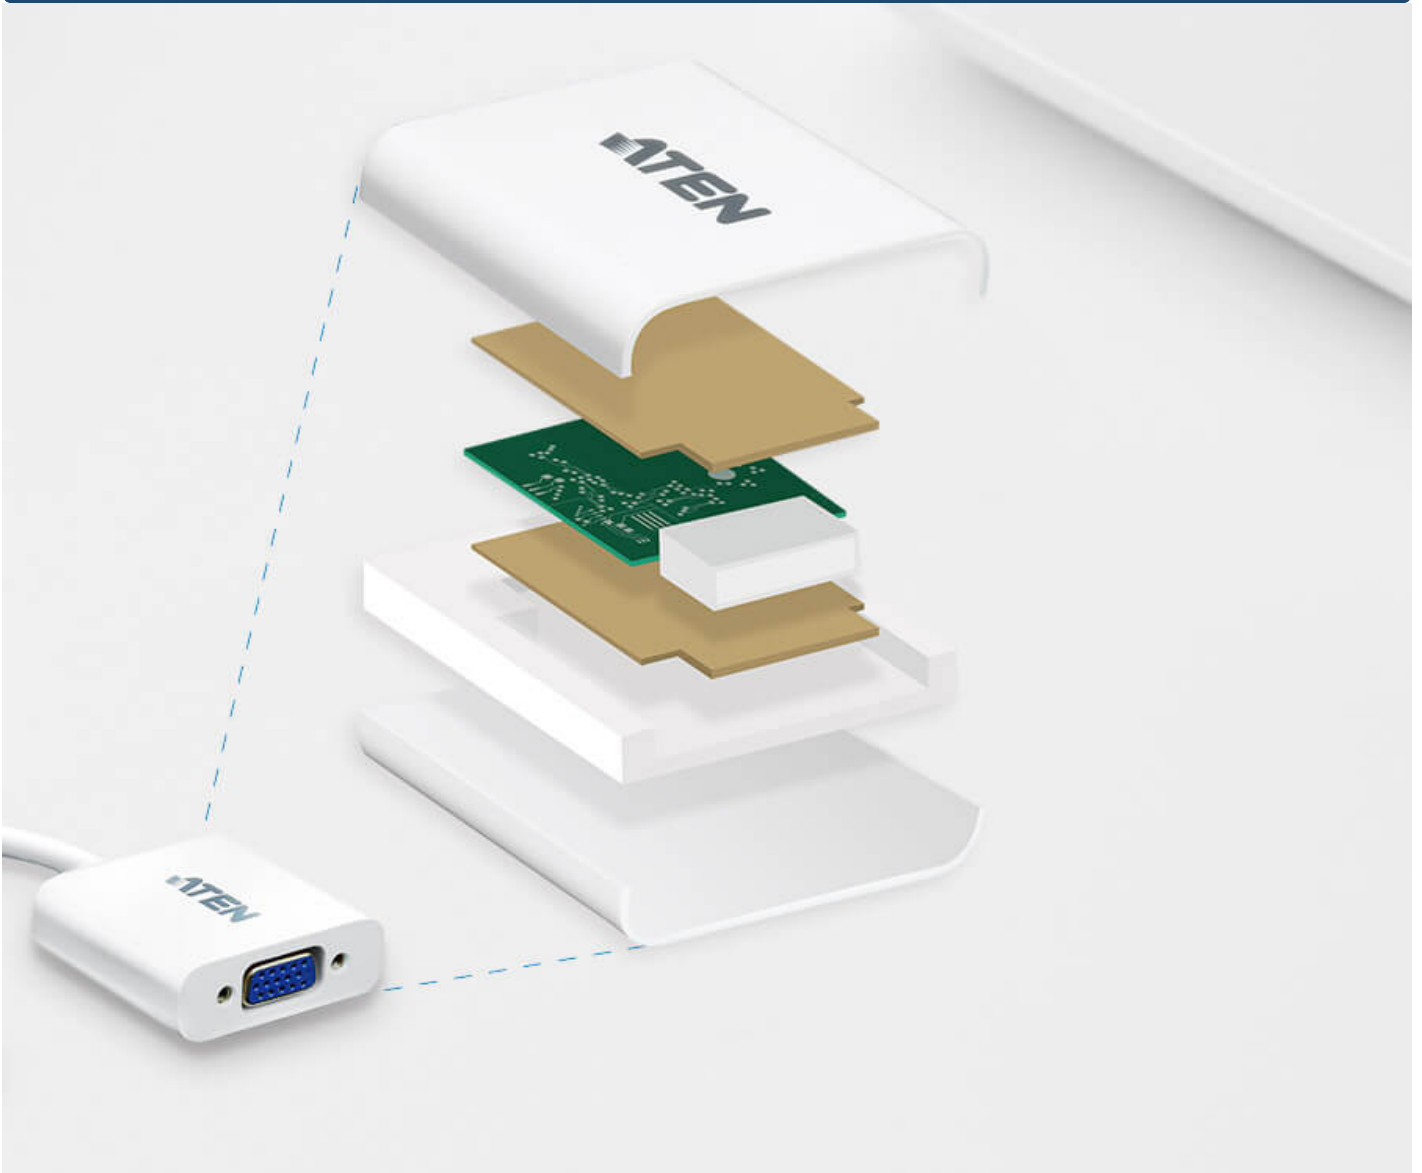

Superior Signal Quality


The internal copper foil shielding protection ensures signal integrity and minimizes external interference, giving you extra reliable and superior quality signals.

[Talk to Our Experts](#)

Talk to Our Experts

If you prefer to have ATEN contact you, please complete the form and a representative will be in touch with you shortly



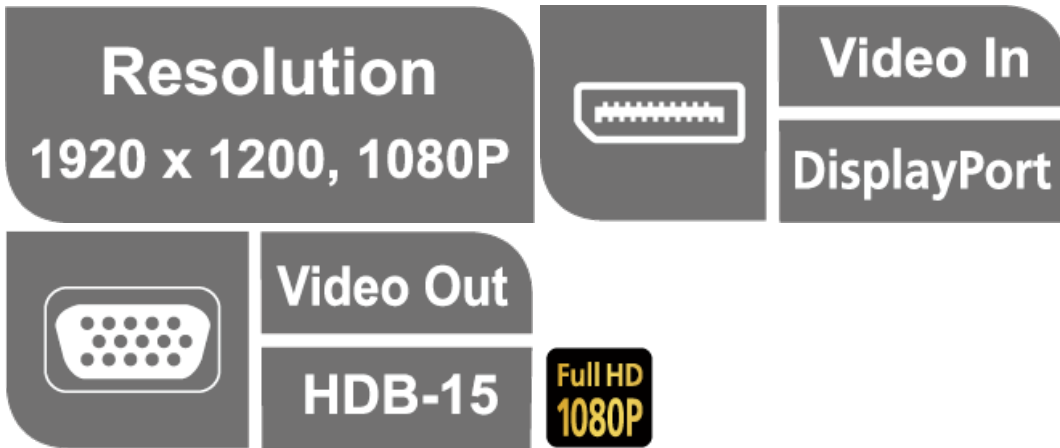

Features

The VC925 is a DisplayPort to VGA adapter, allowing you to connect your device's DisplayPort output to the VGA input of a TV or other display.


The VC925 provide a cost-effective yet high performance signal conversion solution. This adapter is therefore perfect for computers and notebooks, supporting display resolutions of up to WUXGA (1920x1200@60Hz).

- Converts DisplayPort signals to VGA output
- DisplayPort 1.2 compliant
- Supports VGA, SVGA, XGA, SXGA, UXGA and resolutions up to 1920x1200 (PC) / 1080p ([HDTV](#))
- No software or driver installation required

Specifications

| | |
|------------------------|---|
| Video Input | |
| Interfaces | 1 x DisplayPort Male (White) |
| Video Output | |
| Interfaces | 1 x HDB-15 Female (Blue) |
| Video | |
| Max. Pixel Clock | 165 MHz |
| Max. Resolution | Input up to 4096 x 2160@60Hz (4:4:4) Output up to 1920 x 1200 |
| Compliance | DP1.2 |
| Environmental | |
| Operating Temperature | 0 - 50 °C |
| Storage Temperature | -20 - 60 °C |
| Humidity | 0 - 80% RH, Non-Condensing |
| Physical Properties | |
| Housing | Plastic |
| Weight | 0.04 kg (0.1 lb) |
| Dimensions (L x W x H) | 18.00 x 4.50 x 1.50 cm (7.09 x 1.77 x 0.59 in.) |
| Carton Lot | 40 pcs |
| Note | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. |

Diagram

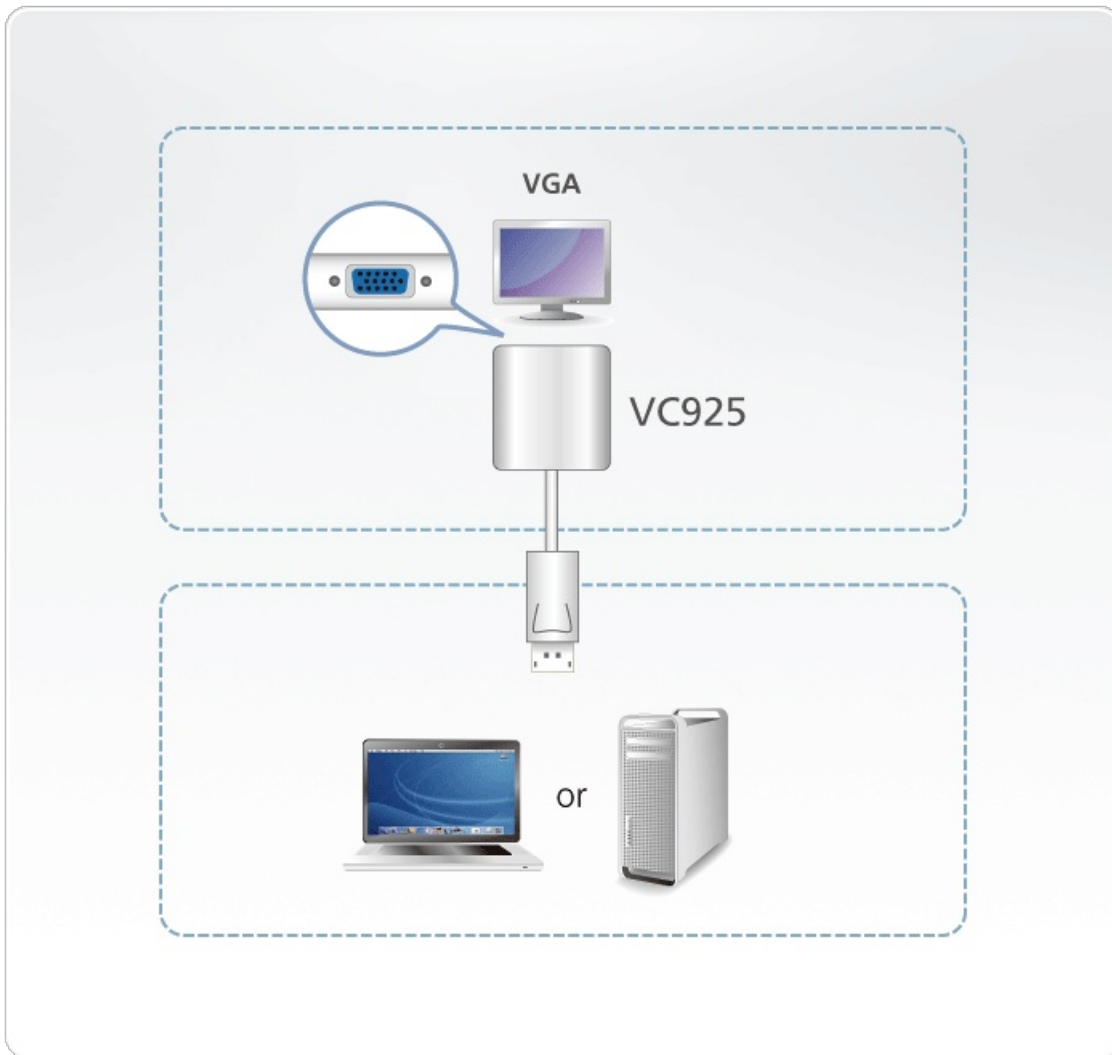

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their
respective owners.