

CS1774

4-포트 USB VGA/오디오 KVME™ 스위치 + 이더넷 허브



CS1774 is a multi-computer KVM Switch with built-in 3-in-1 (KVM Switch, USB 2.0 and Ethernet) function. It can simultaneously control 4 servers via a set of USB keyboard, mouse, and monitor. Moreover, the built-in USB and Ethernet Switch ports can rapidly access USB peripheral devices and share Internet resources at ease.

특장점


- USB 2.0 KVME™ Switch with Ethernet Hub/USB Hub
- Five auto-sensing dual speed ports (Ethernet/Fast Ethernet) plug-and-play enabled; hub complies with IEEE802.3/IEEE802.3u Standard
- 2 port USB 2.0 Hub built in
- Multiplatform support: compatible with all operation platforms PC(Windows, Linux and most others), Mac and Sun
- With speaker and microphone support
- [Bi-directional switching and flexible interoperability; switch permits independent PC, independent peripheral, and independent audio function, regardless of KVM switch focus](#)
- Buzzer On/Off via hotkey
- Keyboard and mouse emulation for error free booting
- Computer selection via front panel pushbuttons and hotkeys
- superior video quality - up to 2048 x 1536; DDC2B
- OS Compatibility: Windows 98, Windows ME, Windows 2000, Windows 2003, Windows XP, [Windows Vista](#), LINUX, Mac OS 8.6/9/10 and SUN Solaris 8/9.
- SUN/Mac keyboard support and emulation*
 - *1. PC keyboard combinations emulate SUN/Mac keyboards.
 - *2. SUN/Mac keyboards only work with their own computers.

사양

컴퓨터 연결	4
포트 선택	Hotkey, Pushbutton
USB 포트 / 오디오 포트 선택	Hotkey
커넥터	
콘솔 포트	2 x USB Type A Female (White) 1 x HDB-15 Female (Blue) 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink)

KVM 포트	4 x SPHD-15 Female (Green) 4 x Mini Stereo Jack Female (Green) 4 x Mini Stereo Jack Female (Pink)
USB 허브	2 x USB Type A Female (White)
펌웨어 업그레이드	1 x RJ-11 Female (Black)
전원	1 x DC Jack(Black)
스위치	
포트	4 x Pushbutton
LED	
USB 링크	4 (Green)
10/100 Mbps	5 (Green)
온라인 / 선택됨	4 (Orange)
링크	5 (Green)
에몰레이션	
키보드 / 마우스	USB
비디오	2048 x 1536; DDC2B
스캔 간격	1-99 seconds
소비 전력	DC 5.3V, 5W 노트: ● 와트 단위의 측정값은 외부 부하가 없는 장치의 일반적인 전력 소비를 나타냅니다. ● BTU/h 단위의 측정값은 장치가 완전히 로드되었을 때 장치의 전력 소비를 나타냅니다.
사용 환경	
사용 온도	0-50°C
보관 온도	-20°-60°C
습도	0-80% RH, Non-condensing
제품 외관	
재질	Metal
무게	0.92 kg (2.03 lb)
크기 (L X W X H)	27.00 x 8.80 x 5.55 cm (10.63 x 3.46 x 2.19 in.)
노트	일부 랙 마운트 제품은,WxDxH의 표준 물리적 치수를 LxWxH 형식으로 사용하고 있습니다.

다이어그램

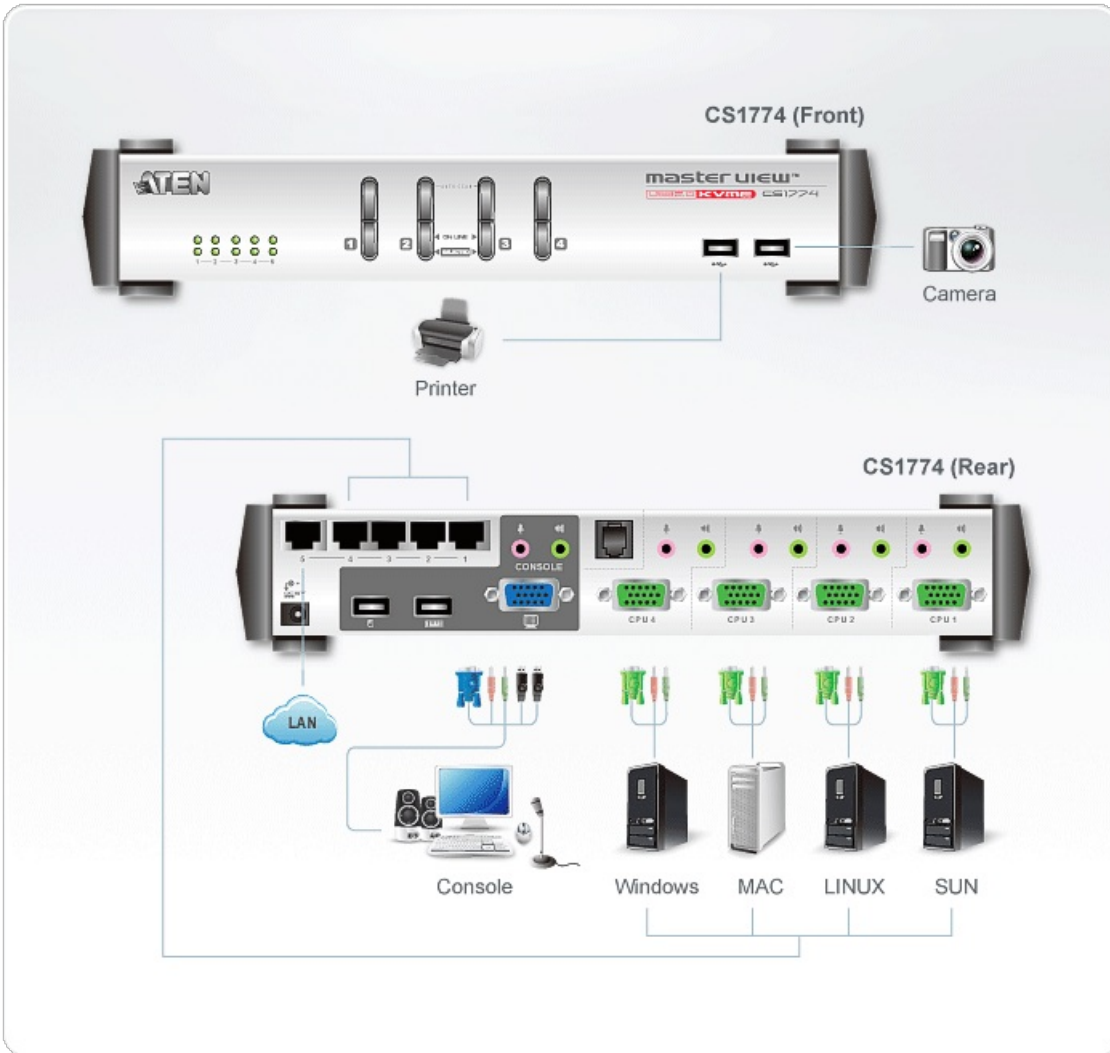

에이텐 코리아 ATEN KOREA

서울시 금천구 디지털로9길 32(가산동) 갑을그레이트밸리 B동 303호

Tel: 02-467-6789

Fax: 02-467-9876

www.aten.com/kr/ko E-mail: marketing@aten.co.kr



© Copyright 2025 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.