

## KL9108M

8-Port Dual Rail LCD IP KVM



The [KL9108](#) is an IP-based KVM control unit that allows both local and remote operators to monitor and access multiple computers from multiple consoles. A single [KL9108](#) can control up to 8 computers and can be accessed from any computer on the Net. The [KL9108](#) features independently retractable 17" LCD monitor and keyboard with built-in touchpad. To maximize space in your data center the keyboard "hides away" when not in use, while the thin profile LCD monitor provides continuous monitoring of computers.




## Features

- Integrated KVM console with 17" LCD monitor in a Dual Rail housing
- Space saving technology with dual bus function support - 1 remote console (one bus) and two local consoles (one bus) control up to 8 computers
- Dual-bus - one local and one remote user can simultaneously control separate ports
- Remotely access computers via the LAN, WAN, or Internet - control your installation when and where you want
- Dual Rail housing is slightly less than 1U with top and bottom clearance for smooth operation in 1U of rack space
- Extra console port - manage computers in the LCD KVM switch from an external console (monitor, PS/2 keyboard, and PS/2 mouse)
- Supports external PS/2 mouse
- Dual Rail - LCD monitor slides independently of the keyboard/touchpad
- LCD module rotates up to 120 degrees for a more comfortable viewing angle
- Console lock - enables the console drawer to remain securely locked away in position when not in use
- Supports dedicated OSD and OSD Toolbar invocation keys
- Internet browser access, Windows Client and Java Client provided, Java Client works with all operating systems
- Graphical OSD and graphical toolbars for convenient, user-friendly operation
- Up to 64 user accounts - up to 32 concurrent remote logins
- Panel Array Mode - view all 8 ports at the same time.
- Message board feature allows logged in users to communicate with each other and allows a remote user to take exclusive control of the KVM functions
- Windows-based Log Server
- Remote power control for attached Power Over the NET™ devices
- Three level login security: Administrator, User, and Select
- Advanced security features include password protection and advanced encryption technologies - 1024 bit RSA, 256 bit AES, 56 bit DES, and 128 bit SSL
- RADIUS server support
- Ports can be set to Exclusive, Occupy and Share
- Network Interfaces: TCP/IP, HTTP, HTTPS, UDP, RADIUS, DHCP, SSL, ARP, DNS, 10Base-T/100Base-TX, auto sense, Ping
- Flash firmware upgradable over network connection
- Keyboard Language support: English(US); English(UK); German;German(Swiss); French; Spanish; Traditional Chinese; Japanese; Korean;Swedish; Italian; Russian; Hungarian; Greek
- Super A-Grade TFT LCD Panel; [Zero Dead Pixel Guarantee](#)
- Multiplatform support:Windows 2000/XP/[Vista](#), Linux, Unix and FreeBSD.
- For more information about KVMs which can connect to [KL9108](#), see [Compatible KVM Table](#)

[More information about "Easy Rack Mounting"...](#)

Diagram

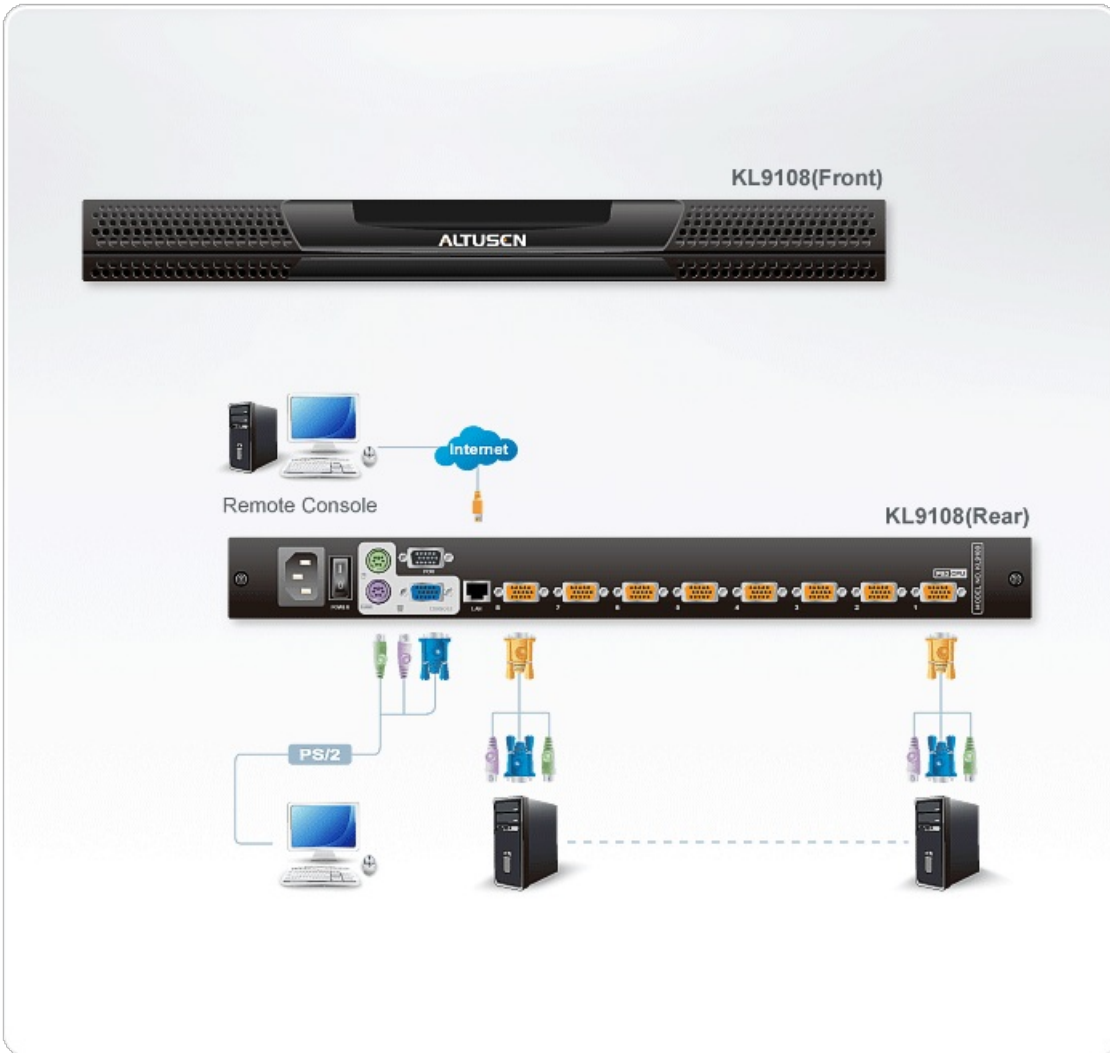

**ATEN International Co., Ltd.**

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their  
respective owners.