

VK258

8-Channel Digital I/O Expansion Box



The VK258 provides Ethernet-to-digital I/O connectivity with 8 channels of digital input/output. It allows users to remotely access digital input / output devices from a PC or any system located anywhere. The complete Telnet CLI commands are fully integrated into users' commercial and industrial applications.

What's more, the VK258 serves as a flexible expansion box of the ATEN Control System, enabling users to control more digital I/O devices, such as various sensors, dry contact devices, PCs, and motor-driven devices in environments where more devices need to be centrally controlled. With the advantage of Ethernet-based connection, the expansion box can be easily connected to controllers via LAN connection from a variety of locations across a network.

Accessories:

*The power adapter for this product is sold separately. For more information about this accessory, see [Accessories](#).


Features

- An Ethernet-to-digital I/O box ships with 8 channels of digital input / output
- Supports Power over Ethernet (PoE) or DC power supply
- WebUI provides VK258 system information, including firmware upgrade
- Supports IEEE 802.1x authentication protocol for enhanced network security
- Supports Telnet CLI (command-line interface) mode for third-party system integration
- An expansion solution for connecting more digital I/O devices to ATEN Control System
- Flexible deployment via Ethernet connection
- Works with a connected ATEN controller with ID Switch through instant configuration

Specification

| | |
|------------------------|--|
| Interfaces | |
| I/O | <ul style="list-style-type: none"> • 8 x Programmable Digital Input / Output Channel (8 x 2-Pole Terminal Block Connector) Digital Input: <ul style="list-style-type: none"> – VDC Mode Input Voltage Range: 0 to 24 VDC Programmable Range: 1 to 24 VDC – Dry Contact Mode Pull-up 2k ohms to +12 VDC Digital Output: <ul style="list-style-type: none"> 300 mA sink from 24 VDC |
| Ethernet | <ul style="list-style-type: none"> • 1 x RJ-45 Female, 10/100Base-T • Supported Protocol: ARP, ICMP, TCP/IP, DHCP, HTTPS, SSH • DHCP-enabled. The following default IP settings will be used if no IP is assigned within 30 seconds: <ul style="list-style-type: none"> IP: 192.168.0.60 Subnet Mask: 255.255.255.0 |
| Switches | |
| Controller ID | 1 x 16-segment Switch |
| Expander ID | 1 x 8-segment Switch |
| Reset Button | 1 x Semi-recessed Pushbutton |
| USB | 1 x USB Type A (Firmware upgrade only) |
| Power Consumption | <p>DC5V:2.2W:36BTU/h POE:2.75W:39BTU/h</p> <p>Note:</p> <ul style="list-style-type: none"> ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. |
| Power | |
| Output | 12 VDC, 300 mA |
| Environmental | |
| Operating Temperature | 0 – 50°C |
| Storage Temperature | -20 – 60°C |
| Humidity | 0 - 80% RH, Non-Condensing |
| Physical Properties | |
| Housing | Metal |
| Weight | 0.46 kg (1.01 lb) |
| Dimensions (L x W x H) | 13.00 x 7.58 x 4.20 cm (5.12 x 2.98 x 1.65 in.) |
| Note | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. |

Diagram

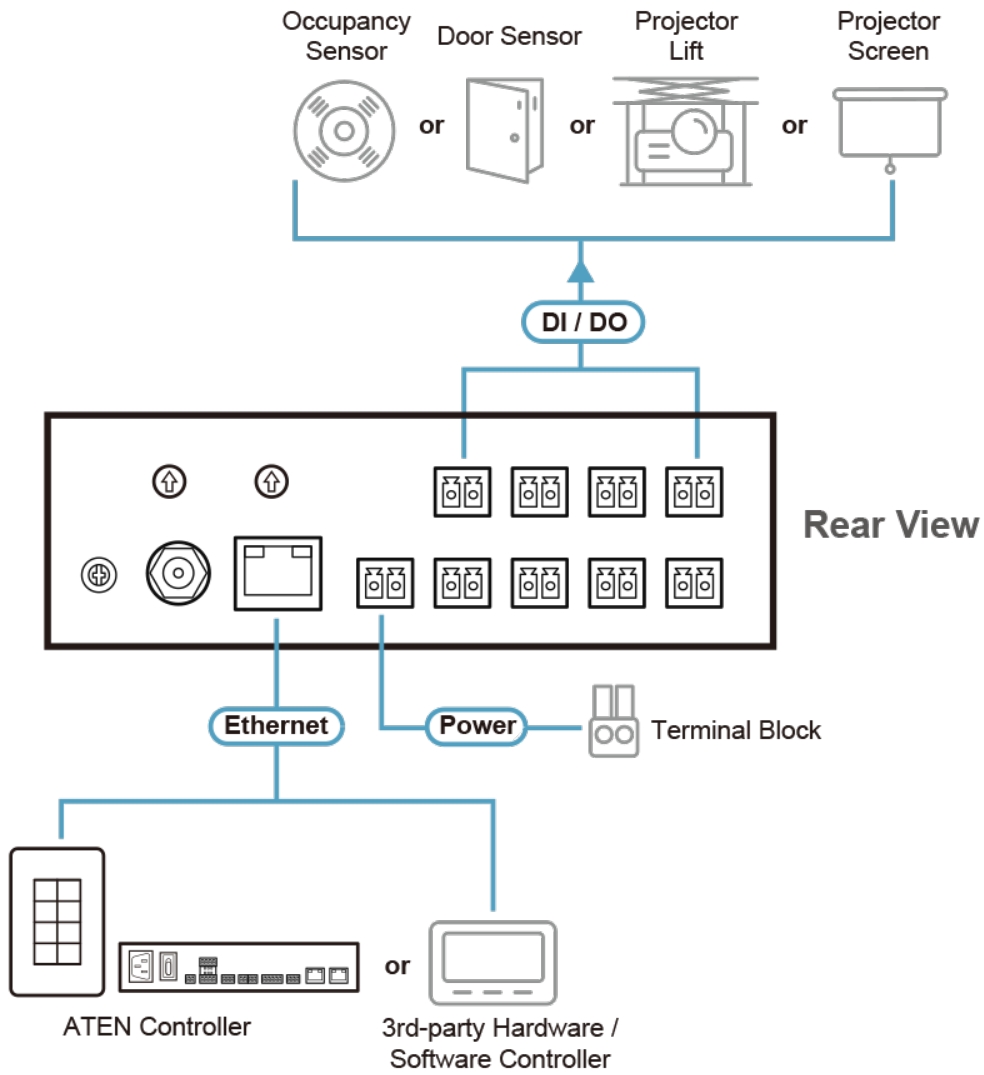

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.