

## UCE33100

4-Port USB 3.2 Gen 1 Cat 6A Extender (up to 100 m)



UCE33100 | 4-Port USB 3.2 Gen 1 Cat 6A Extender

**Extend via Cat 6A,  
Enhance USB 3.2 and Serial Transmission**  
Versatile Coverage up to 100 m



As the scope of meeting rooms continually evolves, it's critical that we keep pace and maintain fast data transmission that extends to a longer distance should the occasion arise. In such cases, the UCE33100 becomes your perfect partner as it extends your USB connectivity across a distance of up to 100 m over a Cat 6A cable to assure a smooth meeting experience and contribute toward your overall operational efficiency at the office.



Long Distance Transmission



USB 3.2 Gen 1



Power Over Cable



RS-232 Pass-through



Frame Synchronization



Mounting Kit

**5 Gbps High-Speed Data Transmission over 100 m**

Transmit USB 3.2 data at an ultra-high 5 Gbps speed spanning a distance up to 100 m with a Cat 6A cable\*. (Product recommendation: [2L-29330](#))

**5 Gbps over 100 m**

Local

Remote

USB-A Devices


Server Room

Meeting Room

Cat 6A cable\*

**4 X USB Type-A Ports for Plug-n-Play Peripheral Connections**

Enhance the resourcefulness of the extender by tapping into its 4 USB type-A ports and have a wide range of peripherals at your disposal.

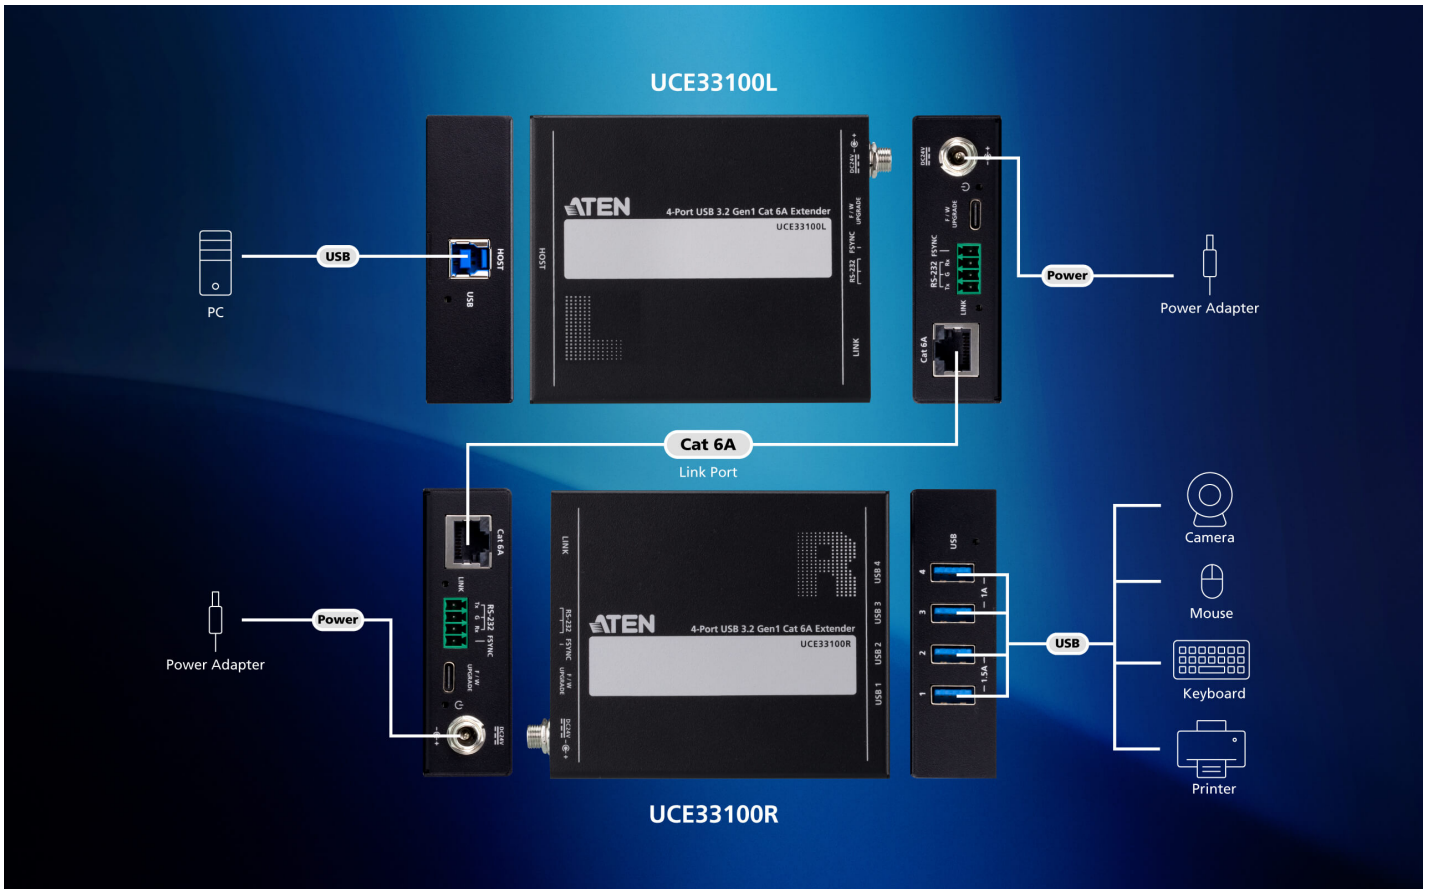

**PoC Power Supply for Ultimate Usability Convenience**

Either the local or remote unit could be plugged into a power source, powered by just a Cat 6A connection cable.

**Easily Mountable for Versatile Deployment**

For added ease of installation and expansion, a mounting kit is provided as a resourceful accessory to facilitate easy and convenient installation.


**Applications**

The additional length afforded by the extender (up to 100 m) means it can be a worthwhile versatile addition to the various spacious applications below:

- 1.
- 2.
- 3.
- 4.



Conference/Education

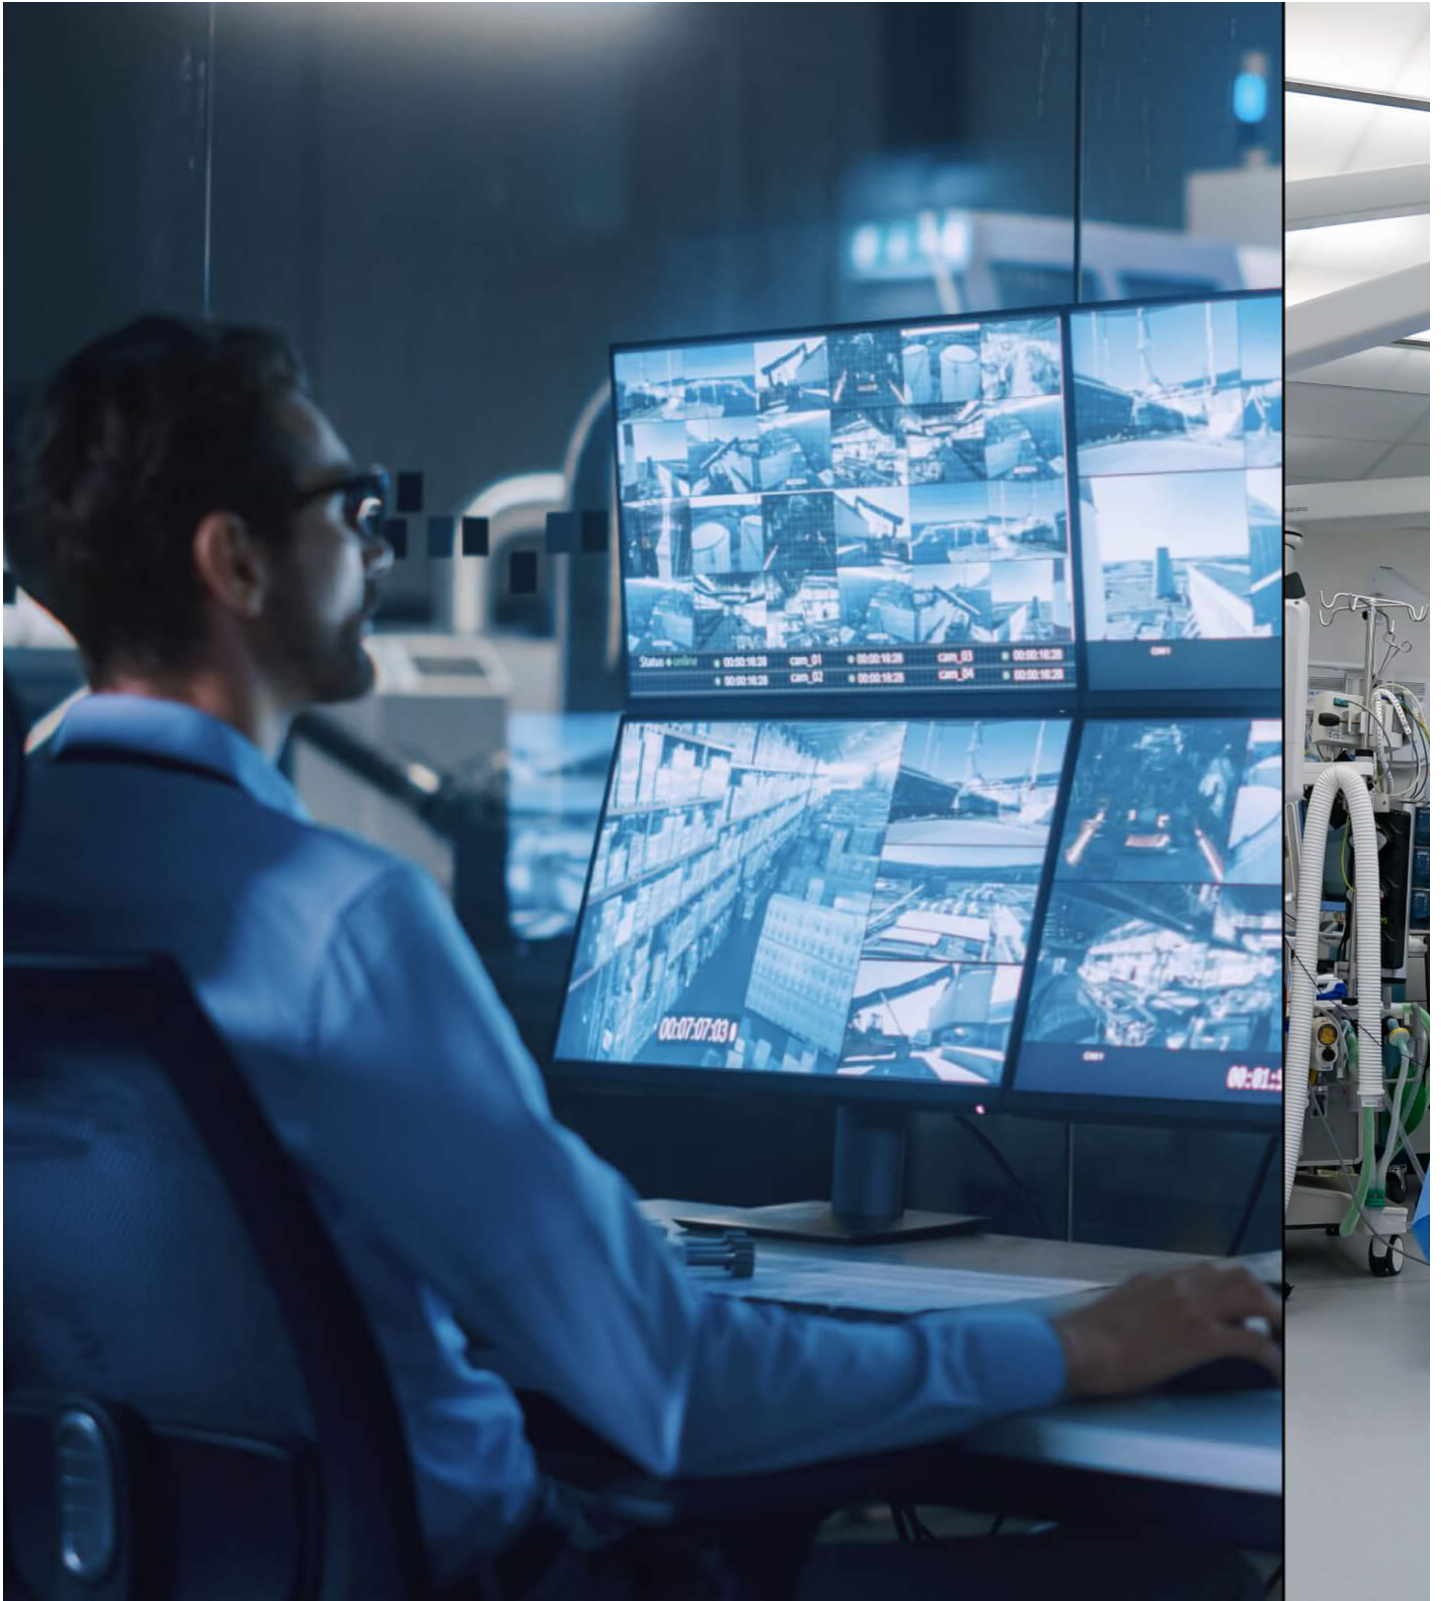

Industrial Control/Healthcare

[Previous](#) [Next](#)

Talk to Our Experts

If you prefer to have ATEN contact you, please complete the form and a representative will be in touch with you shortly

First Name \*

Last Name \*

- Country \*

Company \*

Email \*

Phone Number \*

- Customer Type \*

Job Title \*

**USB 3.2**

**Gen 1**

**Transparent**

**USB Support**

**Power over**

**Cable**

**RS-232**

**Channel**



**Features**

The UCE33100 is a two-piece extension kit that transmits uncompressed USB 3.2 data at up to 5Gbps over a 100 m Cat 6A cable. With four USB Type-A ports built on the remote unit, the connection to multiple USB peripherals, from flash drives, keyboards, mice, and webcams to interactive whiteboards, is made easy. The support for bi-directional RS-232 pass-through facilitates integration into control systems, and apart from that, the Frame Synchronization (FSYNC) GPIO pass-through ports allow bi-directional commands to be sent when it comes to industrial camera implementations. The bi-directional 24V power over cable function eliminates the need for an additional power adapter when either of the local or remote unit receives power.


The UCE33100 supports plug-and-play operation to work flawlessly with all operating systems, assuring hassle-free installation with no extra driver or software required. Flexibility is further enhanced due to the extender's compact, wall-mountable enclosure, which also helps save space.

- A two-piece extension kit that transmits USB signals over a Cat 6A cable
- Long distance USB 3.2 data transmission at up to 5Gbps across 100m
- Backward compatible with USB 2.0 / 1.1 specifications
- 4x USB Type-A ports built on the remote unit for connection to multiple USB peripherals (flash drives, keyboards, mice, webcams, interactive whiteboards, and any other USB-based devices)
- Supports bi-directional RS-232 pass-through for integration into control systems
- Supports bi-directional Frame Synchronization (FSYNC) GPIO pass-through for industrial camera applications
- Bi-directional 24V power over cable eliminates the need for an additional power adapter when either of the local or remote unit receives power
- Plug-and-play with no driver / software required to work with all operating systems
- Compact, wall-mountable enclosure elevates installation flexibility and helps save space

Specification

|                        |  |
|------------------------|--|
| Local Unit             |  |
| Upstream Port          | 1 x USB Type B Female  |
| Downstream Port        | 1 x RJ45 Female, HDBT-USB3<br>1 x USB Type C Female (Firmware Upgrade)<br>1 x 3-pin Terminal Plug (RS-232)<br>1 x 1-pin Terminal Plug (FSYNC)<br><br>Note: The USB-C port is for firmware upgrade only. Please do not connect any other devices during regular use.  |
| Power                  | 1 x DC Jack  |
| Remote Unit            |  |
| Upstream Port          | 1 x RJ45 Female, HDBT-USB3   |
| Downstream Port        | 4 x USB Type A Female<br>1 x USB Type C Female (Firmware Upgrade)<br>1 x 3-pin Terminal Plug (RS-232)<br>1 x 1-pin Terminal Plug (FSYNC)<br><br>Note: The USB-C port is for firmware upgrade only. Please do not connect any other devices during regular use.       |
| Power                  | 1 x DC Jack  |
| USB Specification      | USB3.2 Gen1  |
| Cable Type             | Cat 6A Ethernet Cable<br>Note: We recommend using cables of HDBaseT 3.0 Certified Cat 6A U/FTP cable for a better transmission.  |
| Signal Range           | 100m   |
| LEDs                   |  |
| Status                 | 3 x LED  |
| Power Consumption      | DC24V:1.92WBTU/h<br>DC24V:2.64WBTU/h<br><br>Note:<br>● The measurement in Watts indicates the typical power consumption of the device with no external loading.<br>● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. |
| Environmental          |  |
| Operating Temperature  | 0°C to 40°C  |
| Storage Temperature    | -20°C to 60°C  |
| Humidity               | 20~90% RH, Non-condensing  |
| Physical Properties    |  |
| Weight                 | 0.26 kg ( 0.57 lb )  |
| Housing                | Metal Enclosure  |
| Dimensions (L x W x H) | 10.75 x 8.50 x 2.55 cm<br>(4.23 x 3.35 x 1 in.)  |
| Note                   | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.  |

Diagram

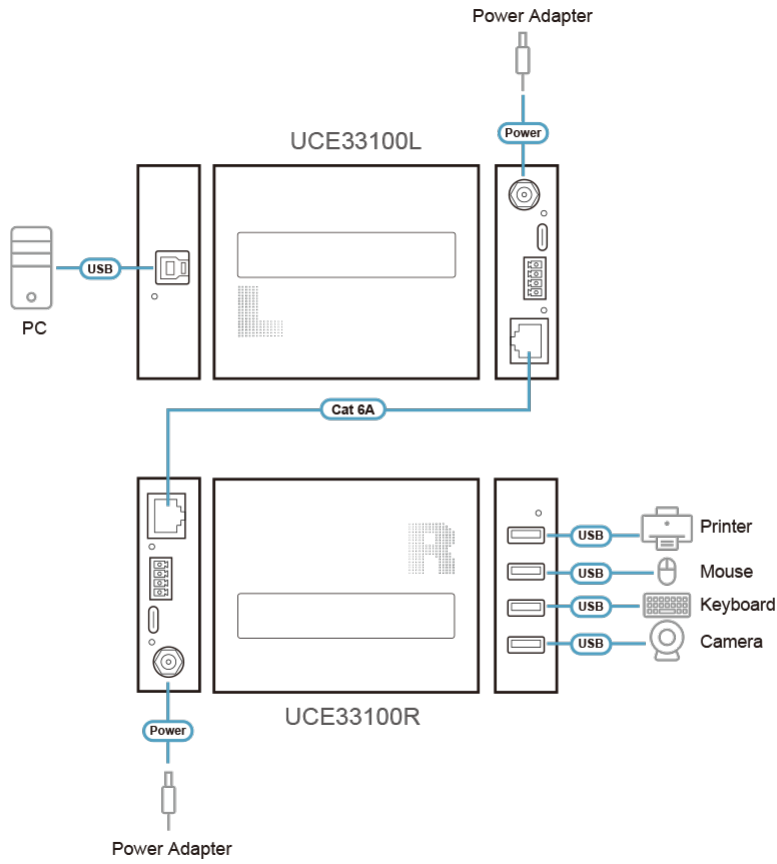

**ATEN International Co., Ltd.**

3F., No. 125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their  
 respective owners.