

## CS62S

2-Port PS/2 VGA Cable KVM Switch (0.9m)



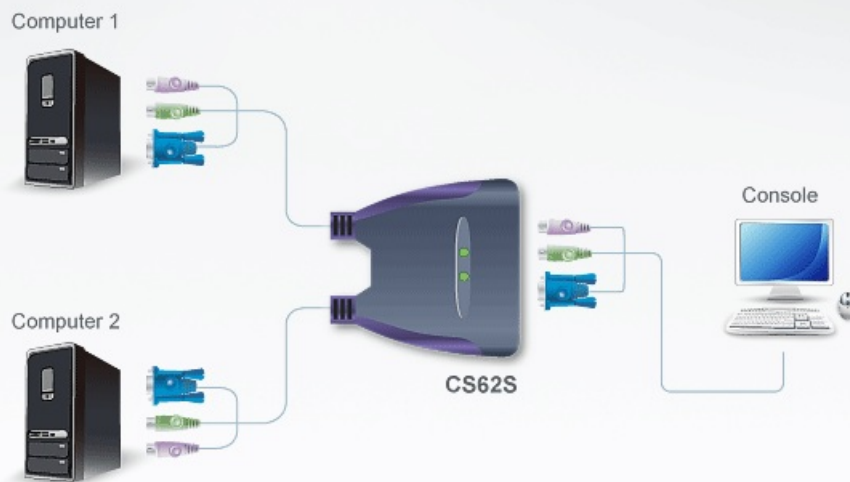
CS62S 2-port KVM Switch has a handy design integrating with 0.9m of cable. It can control 2 servers via a single console.

### Features

- One PS/2 console controls 2 PS/2 computers
- Compact design, built in 0.9m cables
- All-in-one design
- Superior video quality-up to 2048 x 1536; DDC2B
- Auto Scan function to monitor computer operation
- Bus-Powered
- OS Compatibility includes Windows 2000/XP/Vista,LINUX and FreeBSD

## Specifications

|                        |                                                                                                                                                                                                                                                   |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Computer Connections   | 2                                                                                                                                                                                                                                                 |
| Port Selection         | Hotkey                                                                                                                                                                                                                                            |
| Connectors             |                                                                                                                                                                                                                                                   |
| Console Ports          | 1 x HDB-15 Female (Blue)<br>1 x 6-pin Mini-DIN Female (Purple)<br>1 x 6-pin Mini-DIN Female (Green)                                                                                                                                               |
| KVM Ports              | 2 x HDB-15 Male (Blue)<br>2 x 6-pin Mini-DIN Male (Purple)<br>2 x 6-pin Mini-DIN Male (Green)                                                                                                                                                     |
| LEDs                   |                                                                                                                                                                                                                                                   |
| Selected               | 2 (Green)                                                                                                                                                                                                                                         |
| Cable Length           |                                                                                                                                                                                                                                                   |
| Computer               | 2 x 0.9 m                                                                                                                                                                                                                                         |
| Emulation              |                                                                                                                                                                                                                                                   |
| Keyboard / Mouse       | PS/2                                                                                                                                                                                                                                              |
| Video                  | 2048 x 1536; DDC2B                                                                                                                                                                                                                                |
| Scan Interval          | 3, 5, 10, 20 seconds (default: 5 secs.)                                                                                                                                                                                                           |
| Power Consumption      | DC5V:0.17W:5BTU/h<br><br>Note:<br>● The measurement in Watts indicates the typical power consumption of the device with no external loading.<br>● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. |
| Environmental          |                                                                                                                                                                                                                                                   |
| Operating Temperature  | 0-50°C                                                                                                                                                                                                                                            |
| Storage Temperature    | -20-60°C                                                                                                                                                                                                                                          |
| Humidity               | 0-80% RH, Non-condensing                                                                                                                                                                                                                          |
| Physical Properties    |                                                                                                                                                                                                                                                   |
| Housing                | Plastic                                                                                                                                                                                                                                           |
| Weight                 | 0.25 kg ( 0.55 lb )                                                                                                                                                                                                                               |
| Dimensions (L x W x H) | 7.30 x 6.24 x 2.25 cm<br>(2.87 x 2.46 x 0.89 in.)                                                                                                                                                                                                 |
| Note                   | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.                                                                                                                   |

**Diagram****ATEN International Co., Ltd.**

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan

Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their  
respective owners.