

## CS12

Master View - PS/2 KVM Switch



CS12 is a KVM Switch with built-in PS/2. It can control 2 servers via a single console and allows users to switch between computers via the buttons on the upper side of the switch or the hotkey configuration on the console keyboard. It is the simplest and most convenient solution for multi-computer management.


### Features

- Supports Microsoft IntelliMouse, Logitech MouseMan, FirstMouse, IBM Scrollpoint Mouse.
- Keyboard and mouse emulation for error free PC booting.
- Caps Lock, Num Lock, and Scroll Lock States are saved and restored when switching.
- Supports 1920 x 1440 resolution.
- Easy to Install - No software required
- Easy to Operate - PC selection via push button switch or hot keys - Auto scan function to monitor PC operation.
- LED display for easy status monitoring.
- Non-powered.
- Supports DDC2B (Display Data Channel).
- OS Compatibility: DOS, WIN 98/WIN ME/WIN NT/WIN 2K/WIN XP/WIN 2003,LINUX. Mac 8.6/9/10 and SUN Solaris 8/9 (with optional adapter).

## Specifications

|                        |                                                                                                                                                                                                                                                    |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Port Selection         | Pushbutton Switch / Hot Keys                                                                                                                                                                                                                       |
| Connectors             |                                                                                                                                                                                                                                                    |
| Console Ports          | 1 x Mini Din-6 Female (Purple)<br>1 x Mini Din-6 Female (Green)<br>1x HDB-15 Female (Blue)                                                                                                                                                         |
| Computers              | 2 x Mini Din-6 Female (Purple)<br>2 x Mini Din-6 Female (Green)<br>2 x HDB-15 Male (Blue)                                                                                                                                                          |
| LEDs                   |                                                                                                                                                                                                                                                    |
| Selected               | 2                                                                                                                                                                                                                                                  |
| Emulation              |                                                                                                                                                                                                                                                    |
| Keyboard               | PS/2                                                                                                                                                                                                                                               |
| Mouse                  | PS/2                                                                                                                                                                                                                                               |
| Video Resolution       | 1920 x 1440 ( Max.); DDC2B                                                                                                                                                                                                                         |
| Power Consumption      | DC 9V 80mA ( Max.)<br><br>Note:<br>● The measurement in Watts indicates the typical power consumption of the device with no external loading.<br>● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. |
| Scan Interval          | 5 sec.                                                                                                                                                                                                                                             |
| Housing                | Plastic                                                                                                                                                                                                                                            |
| Physical Properties    |                                                                                                                                                                                                                                                    |
| Weight                 | 0.14 kg                                                                                                                                                                                                                                            |
| Dimensions (L x W x H) | 10.55x9.60x2.80cm                                                                                                                                                                                                                                  |
| Note                   | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.                                                                                                                    |

## Diagram

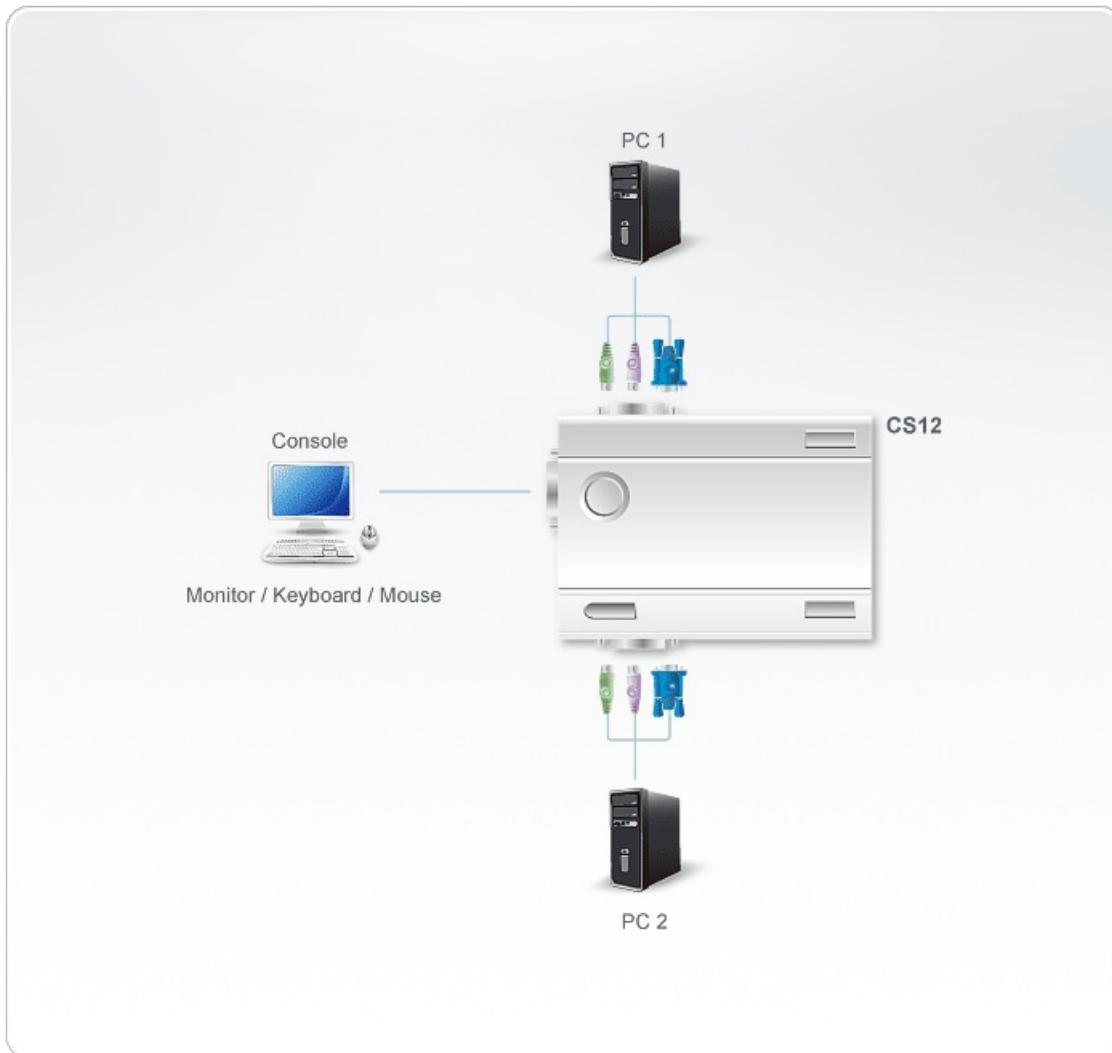

### **ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their  
 respective owners.