

PE6216

20A/16A 16-Outlet Metered & Switched eco PDU

PE6216A



ATEN has developed a new generation of green energy power distribution units (PDUs) to effectively increase the efficiency of data center power usage. The PE6216 eco PDUs are intelligent PDUs that contain 16 AC outlets and are available in various IEC or NEMA socket configurations.

The series provides secure, centralized, intelligent power management (power on / off / cycle) of data center IT equipment (servers, storage systems, KVM switches, network devices, serial data devices, etc.), as well as the ability to monitor the center's health environment via sensors*.

The PE6216 eco PDU offers remote power control combined with realtime power measurement – allowing you to control and monitor the power status of devices attached to the PDUs, either at the PDU device or outlet level, from practically any location via a TCP/IP connection.

The power status of each outlet can be set individually, allowing users to switch each device On/Off. The eco PDU also offers comprehensive power analysis reports – providing precise measurements of current, voltage, power and watt-hour in a realtime display.

These eco PDUs support any 3rd party v1, v2 & v3 SNMP Manager Software and ATEN [eco DC](#) (Energy & DCIM Management Web GUI). [eco DC](#) provides an easy method for managing multiple devices, offering an intuitive and user-friendly GUI that allows users to configure a PDU device and monitor power status of the equipment connected to it.

With its advanced security features and ease of operation, the eco PDU is the most convenient, most reliable, and most cost effective way to remotely manage power access for multiple computer installations and allocate power resources in the most efficient way possible.

* Sensors are optional accessories. A sensor-enabled installation is required to generate a more complete energy-efficient data and chart.

Features

- **Power Distribution**
- Space saving 0U rack mount design with rear mounting
- IEC or NEMA outlet models
- 3 x 7-segment front panel LED shows Current / IP Address for PDU / Bank
- Remote users can monitor PDU/Bank status via web pages on their browsers
- Safe shutdown support
- Separate power for the unit’s own power and its power outlets – the user interface is still accessible even when an overload condition trips the devices’ circuit breaker

Remote Access

- Remote power control via TCP/IP and a built in 10 / 100 Ethernet port
- Network Protocols: TCP / IP, UDP, HTTP, HTTPS, SSL, SMTP, DHCP, NTP, DNS, auto sense, Ping,Telnet
- Energy & DCIM Management Web GUI – [eco DC](#)
- Supports SNMP Manager V1, V2 & V3

Operation

- Local and Remote power outlet control (On, Off, Power Cycle) by individual outlets
- Supports multiple power control methods – Wake on LAN, System After AC Back, Kill the Power
- Power-on sequencing – users can set the power on sequence and delay time for each port to allow equipment to be turned on in the proper order
- Easy setup and operation via a browser-based user interface
- Multibrowser support (IE, Firefox, Chrome, Safari, Opera, and Netscape)
- RTC support to keep the timer running during times of no power.
- Up to 8 user accounts and 1 administrator account
- Proactive Overload Protection (POP) – automatically powers off outlets when current overloads to protect operating devices

Management

- Power status measurement at the PDU/Bank level
- LED indicators for current and IP address at the PDU device and/or Bank levels
- Real-time aggregate current, voltage, and power and power dissipation displayed in a browser-based UI for monitoring at the PDU level
- Environment monitoring – supports external temperature / humidity / Differential Pressure sensors for rack environment monitoring
- Current and voltage threshold setting
- Naming support for outlets
- User outlet access assignment on an outlet-by-outlet basis
- Event logging and syslog support
- Upgradeable firmware
- Multilanguage support: English, Traditional Chinese, Simplified Chinese, Japanese, German, Italian, Spanish, French, Russian

Security

- Two-level password security
- Strong security features include strong password protection and advanced encryption technologies – 128 bit SSL
- Remote authentication support: RADIUS

eco DC Energy & DCIM Management Web GUI*

- Automatic discovery of all PE devices within the same intranet
- Remote real-time power measurement and monitoring
- Remote real-time environment sensor monitoring
- Plotting/Monitoring of all PE devices
- Exceed threshold alert through SMTP and System log
- Power Analysis Report


*eco DC is designed to work with eco PDUs, and is bundled with all PE series packages.

| Model | Inlet | Outlets | Monitoring Level | Amps | |
|---------|-------------|-------------------------------------|------------------|----------|----------------------|
| | | | | Per Port | Total |
| PE6216A | IEC 320 C20 | 14 x NEMA 5-15R 2 x NEMA 5-20R | PDU | 12A/16A | 16A (UL), 20A (Max.) |
| PE6216B | IEC 320 C20 | 14 x IEC 320 C13 2 x IEC 320 C19 | PDU | 12A/16A | 16A (UL), 20A (Max.) |
| PE6216G | IEC 320 C20 | 14 x IEC 320 C13 2 x IEC 320 C19 | PDU | 10A/15A | I: 16A O: 15A |

Specifications

| Function | PE6216A | PE6216B | PE6216G |
|-----------------------------------|--|---|---|
| Electrical | | | |
| Nominal Input Voltage | 100 – 120 VAC | 100 – 240 VAC | 100 – 240 VAC |
| Maximum Input Current | 20A(Max) | 20A(Max) | 16A(Max) |
| Input Frequency | 50-60 Hz | 50-60 Hz | 50-60 Hz |
| Input Connection | NEMA 5-20P | NEMA 6-20P | IEC 60320 C20 |
| Input Power | 2400 VA(Max) | 4160 VA(Max) | 3680 VA(Max) |
| Outlet Type | Total: 14 x NEMA 5-15R + 2 x NEMA 5-20R Bank1-1: Outlet 1 – 8; 7 x NEMA 5-15R + 1 x NEMA 5-20R Bank1-2: Outlet 9 – 16; 7 x NEMA 5-15R + 1 x NEMA 5-20R | Total: 14 x IEC320 C13 + 2 x IEC320 C19 Bank1-1: Outlet 1 – 8; 7 x C13 + 1 x C19 Bank1-2: Outlet 9 – 16; 7 x C13 + 1 x C19 | Total: 14 x IEC320 C13 + 2 x IEC320 C19 Bank1-1: Outlet 1 – 8; 7 x C13 + 1 x C19 Bank1-2: Outlet 9 – 16; 7 x C13 + 1 x C19 |
| Nominal Output Voltage | 100 – 120 VAC | 100 – 240 VAC | 100 – 240 VAC |
| Maximum Output Current (Outlet) | NEMA 5-15R: 15A(Max) NEMA 5-20R: 20A(Max) | C13: 15A(Max) C19: 20A(Max) | C13: 10A(Max) C19: 16A(Max) |
| Maximum Output Current (Bank) | 20A(Max) | 20A(Max) | 16A(Max) |
| Maximum Output Current (Total) | 20A(Max) | 20A(Max) | 16A(Max) |
| Breakers | 1 x 20A Non-Fuse Breaker | 1 x 20A Non-Fuse Breaker | 1 x 16A Non-Fuse Breaker |
| Metering | Bank Level Current, Voltage, VA , PF and kWh Monitoring | Bank Level Current, Voltage, VA , PF and kWh Monitoring | Bank Level Current, Voltage, VA , PF and kWh Monitoring |
| Outlet Switching | Yes | Yes | Yes |
| Environment Sensor Ports | 2 | 2 | 2 |
| Metering Accuracy | Voltage Range: 100VAC ~ 250VAC +/-1% Power Range: 100W ~ Maximum Capacity +/- 2% Current Range: 0.1A~1A +/- 0.1A, 1A~20A +/- 1% | Voltage Range: 100VAC ~ 250VAC +/-1% Power Range: 100W ~ Maximum Capacity +/- 2% Current Range: 0.1A~1A +/- 0.1A, 1A~20A +/- 1% | Voltage Range: 100VAC ~ 250VAC +/-1% Power Range: 100W ~ Maximum Capacity +/- 2% Current Range: 0.1A~1A +/- 0.1A, 1A~20A +/- 1% |
| Physical Properties | | | |
| Dimensions (L x W x H) | 132.48 x 6.60 x 4.40 cm (52.16 x 2.6 x 1.73 in.) | 132.48 x 6.60 x 4.40 cm (52.16 x 2.6 x 1.73 in.) | 132.48 x 6.60 x 4.40 cm (52.16 x 2.6 x 1.73 in.) |
| Weight | 3.73 kg (8.22 lb) | 3.73 kg (8.22 lb) | 3.73 kg (8.22 lb) |
| Power Cord Length | 3 m | 3 m | 3 m |
| Environmental | | | |
| Temperature (Operating / Storage) | 0–50°C / -20–60°C | 0–50°C / -20–60°C | 0–40°C / -20–60°C |
| Humidity (Operating & Storage) | 0–80% RH, Non-Condensing | 0–80% RH, Non-Condensing | 0–80% RH, Non-Condensing |
| Compliance | | | |
| EMC Verification | FCC, Others by Request | FCC, Others by Request | CE, C-Tick, Others by Request |
| Safety Verification | cTUVus, PSE, Others by Request | cTUVus, PSE, Others by Request | TUV-CB, GOST, Others by Request |
| Note | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. | | |

Diagram

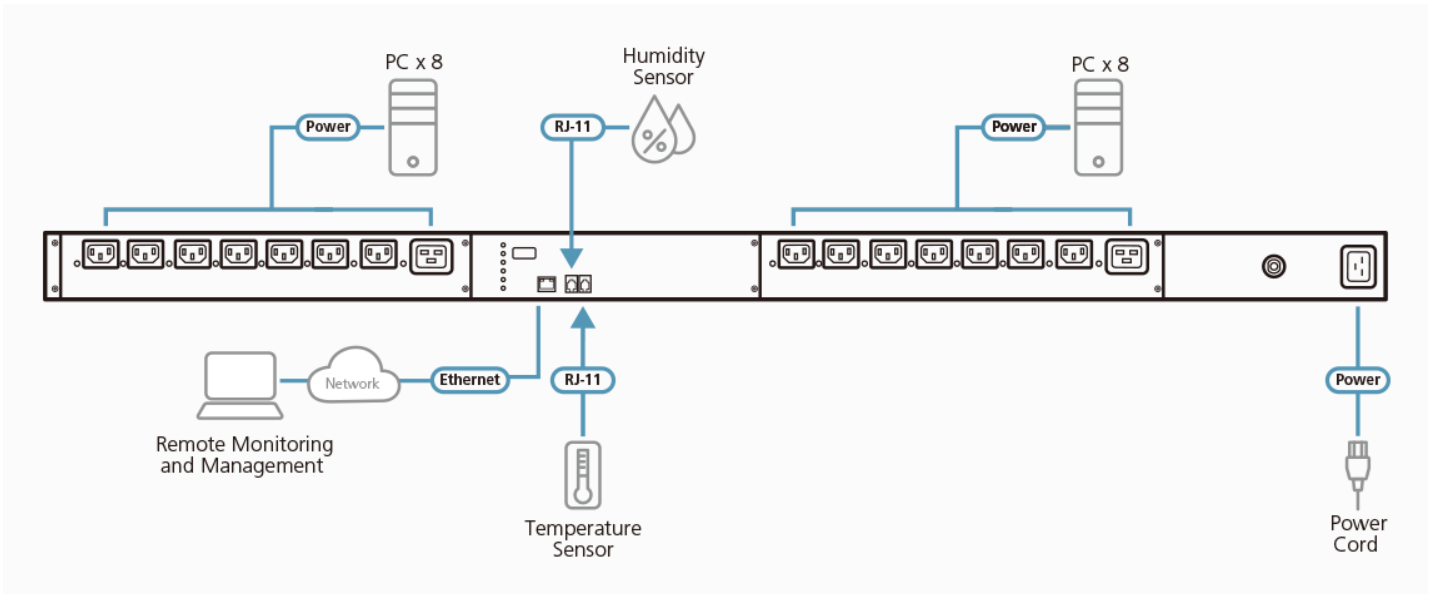

ATEN International Co., Ltd.

3F, No. 125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their
respective owners.