

## UH275

4-Port USB 2.0 Hub



UH275 is a hub with 4 built-in USB2.0 ports. It has LEDs to indicate the connections status, and its handy and slim design allows users to carry it in pockets.




### Features

- Provides 4 additional USB 2.0 ports to existing USB Systems.
- Four independent, fully functional, 480 Mbps, downstream ports.
- Fully compliant with the USB 2.0 specification.
- Supports transfer rates of 1.5 / 12 / 480 Mbps.
- Per port overcurrent protection.
- Compact design, easy to store at anywhere.
- Plug-n-play.
- OS Support: Windows 2000, Windows XP, [Windows Vista](#), Mac and FreeBSD

**Specifications**

Connectors	
USB Port	1 x USB Type A Male (White)
Downstream	4 x USB Type A Female (White)
Power	1x DC Jack (Black)
LEDs	
Power	1 (Green)
Output Voltage (Per Port)	+5V DC
Environmental	
Operating Temperature	0–40°C
Storage Temperature	-20–60°C
Humidity	0–80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.04 kg ( 0.09 lb )
Dimensions (L x W x H)	9.00 x 3.85 x 1.20 cm (3.54 x 1.52 x 0.47 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

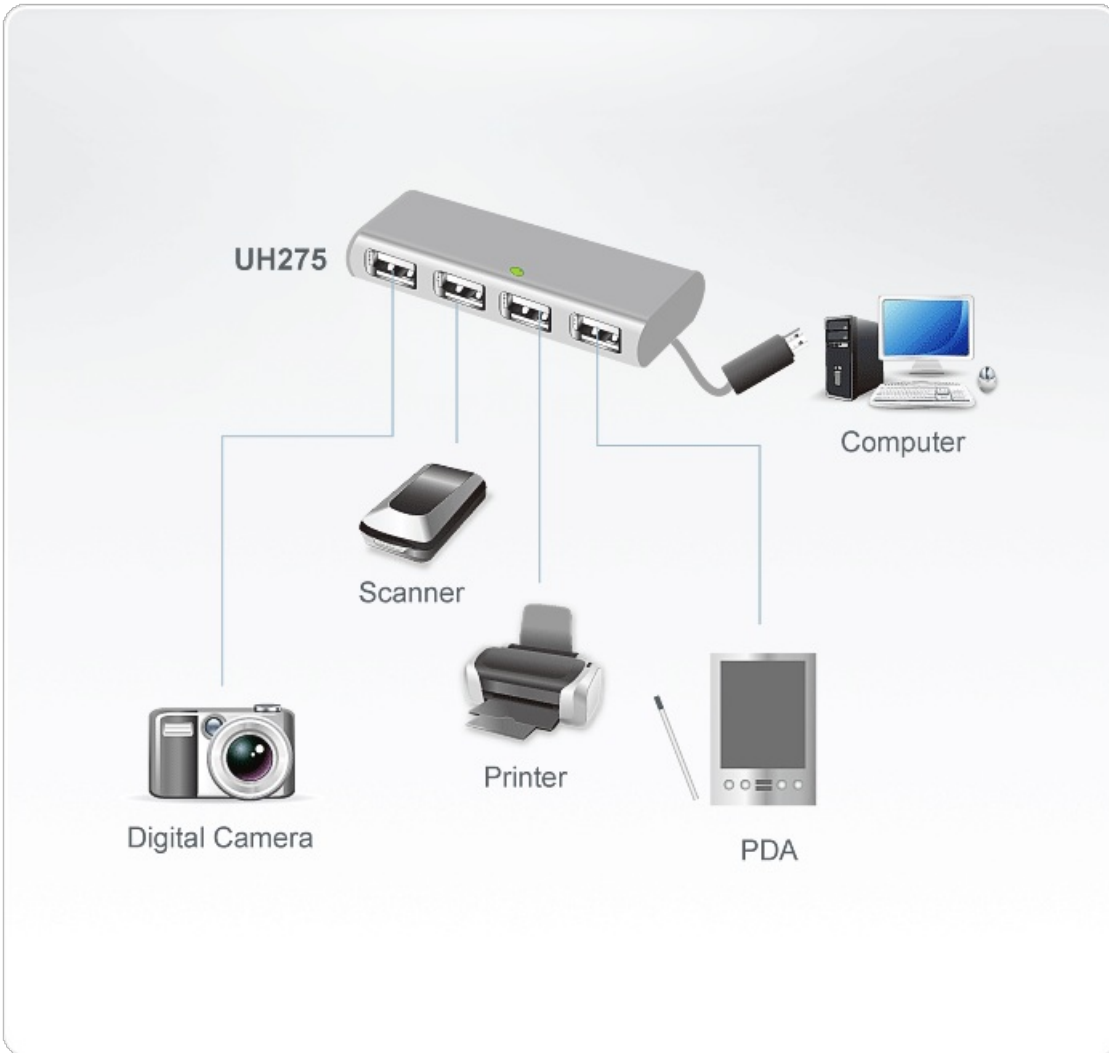

**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their  
respective owners.